


STATE OF NEW MEXICO  
ENERGY AND MINERALS DEPARTMENT

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	<input checked="" type="checkbox"/>
FILE	<input checked="" type="checkbox"/>
U.S.G.S.	
LAND OFFICE	
OPERATOR	<input checked="" type="checkbox"/>

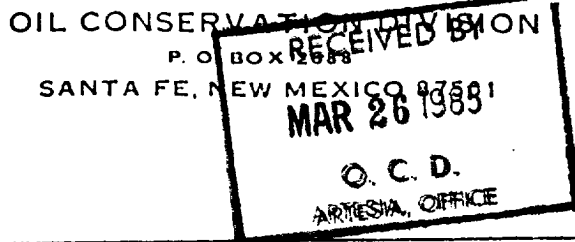

Form C-103  
Revised 10-1-78

5a. Indicate Type of Lease  
State ☐ Fee ☒  
5. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO OPEN OR PLUG BACK TO A DIFFERENT RESERVOIR.  
USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	7. Unit Agreement Name
2. Name of Operator Yates Petroleum Corporation	8. Farm or Lease Name Allie Lee "ABH"
3. Address of Operator 207 South 4th St., Artesia, NM 88210	9. Well No. 1
4. Location of Well UNIT LETTER C, 330 FEET FROM THE North LINE AND 2310 FEET FROM THE West LINE, SECTION 34 TOWNSHIP 18S RANGE 26E NMPM.	10. Field and Loc., or Wildcat Atoka Glorieta Yeso
15. Elevation (Show whether DF, RT, GR, etc.) 3359' GR	12. County Eddy

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data  
NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input type="checkbox"/>	OTHER Production Casing <input checked="" type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

TD 3820'. Ran 93 joints of 5-1/2" casing set 3820'. Regular guide shoe set 3820'. Float collar set 3779'. Cemented w/600 sacks Class "C" + .6% CF-1, .2% AF-S + 5#/sack salt. Compressive strength of cement - 950 psi in 12 hrs. PD 2:15 PM 3-24-85. Bumped plug to 1000 psi, released pressure, float held okay. Tested casing to 1000 psi for 30 minutes, OK. WOC 18 hours.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED Larry Brooks TITLE Production Supervisor DATE 3-26-85

APPROVED BY \_\_\_\_\_ TITLE ORIGINAL SIGNED BY LARRY BROOKS DATE MAR 28 1985  
GEOLOGIST - NMOCD

CONDITIONS OF APPROVAL, IF ANY: