





JURTON
ICES

52256400

DATE	DESCRIPTION	AMOUNT	CHECK NO.	BANK	INITIALS
10/1/01	INITIAL				
10/2/01	INITIAL				
10/3/01	INITIAL				
10/4/01	INITIAL				
10/5/01	INITIAL				
10/6/01	INITIAL				
10/7/01	INITIAL				
10/8/01	INITIAL				
10/9/01	INITIAL				
10/10/01	INITIAL				
10/11/01	INITIAL				
10/12/01	INITIAL				
10/13/01	INITIAL				
10/14/01	INITIAL				
10/15/01	INITIAL				
10/16/01	INITIAL				
10/17/01	INITIAL				
10/18/01	INITIAL				
10/19/01	INITIAL				
10/20/01	INITIAL				
10/21/01	INITIAL				
10/22/01	INITIAL				
10/23/01	INITIAL				
10/24/01	INITIAL				
10/25/01	INITIAL				
10/26/01	INITIAL				
10/27/01	INITIAL				
10/28/01	INITIAL				
10/29/01	INITIAL				
10/30/01	INITIAL				
10/31/01	INITIAL				

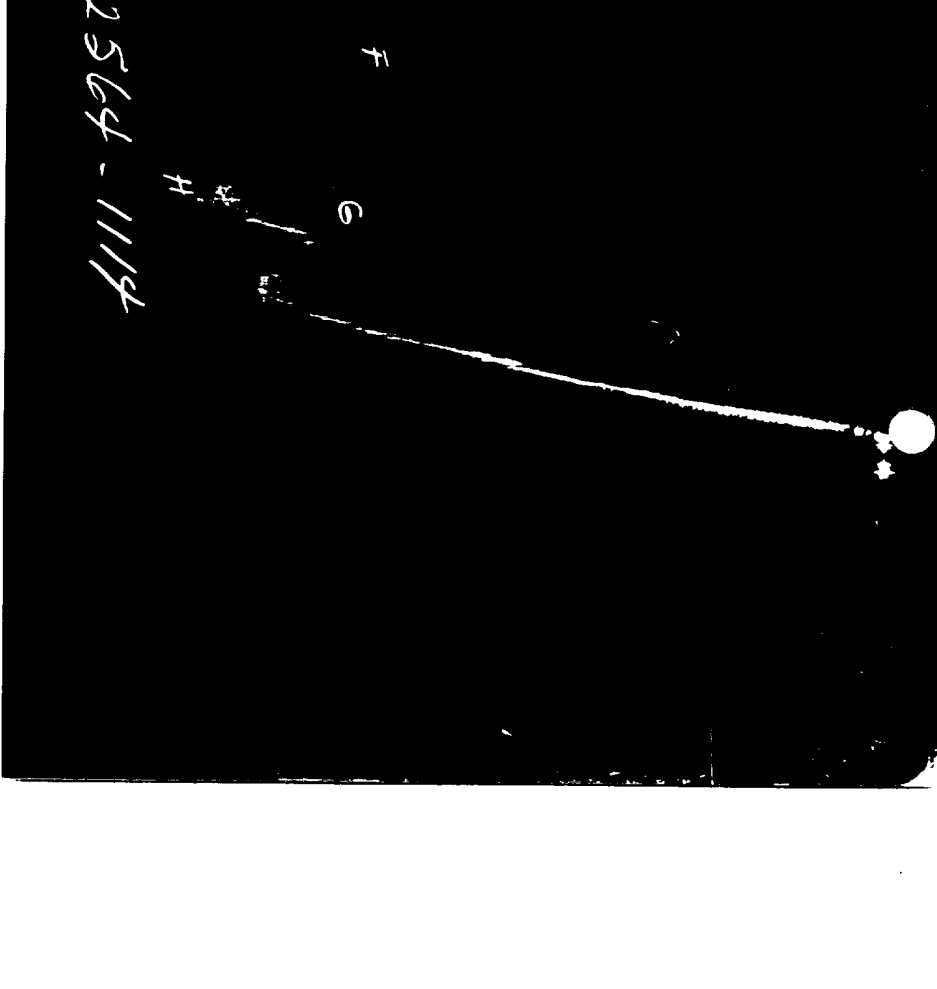

PRESSURE		TIME		TYPE	
REPORTED	CALCULATED	REPORTED	CALCULATED		
4267	4259.3				
	1279.7	10.0	11.0	F	
	1955.4				
	1955.4				
	3518	3523.5	60.0	58.6	C
	2097	2083.2			
	3438	3468.8	60.0	62.2	F
	3438	3468.8			
	3534	3528.9	180.0	178.2	C
	4219	4229.1			

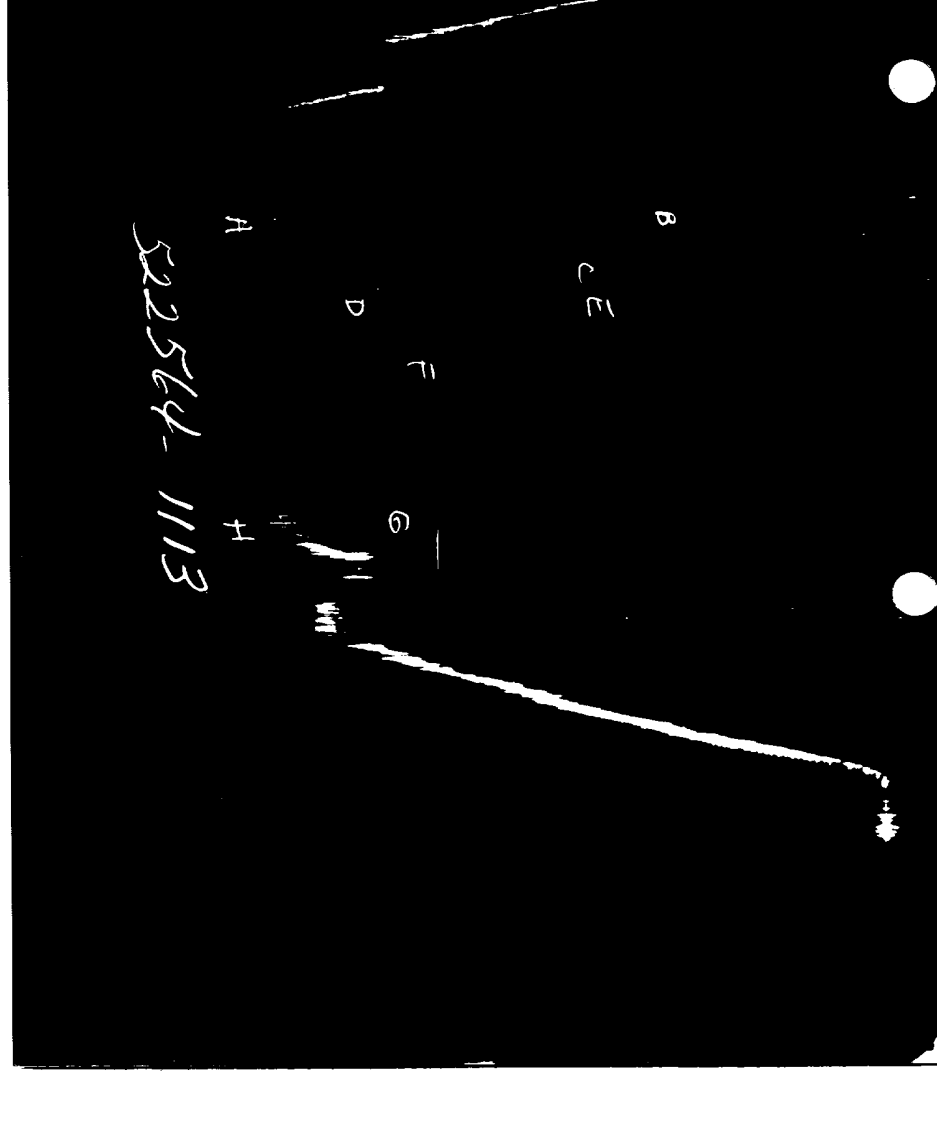

DESCRIPTION	PRESSURE RECORDED	PRESSURE CALCULATED	TIME		TYPE
			REPORTED	CALCULATED	
HYDROSTATIC	4382	4375.8			
F FIRST FLOW	1648	1629.1	10.0	11.0	F
1ST FLOW	2288	2242.3			
F FIRST CLOSED-IN	2288	2242.3	60.0	58.6	C
1ST CLOSED-IN	3646	3635.5			
SECOND FLOW	2288	2246.7	60.0	62.2	F
SECOND FLOW	3674	3580.5			
SECOND CLOSED-IN	3574	3580.5	180.0	178.2	C
SECOND CLOSED-IN	3646	3639.1			
HYDROSTATIC	4346	4352.0			

TYPE & SIZE MEASURING DEVICE			
TIME	CHOKE SIZE	SURFACE PRESSURE PSI	
11-20-88			
2000			
11-21-88			
0100			
0640	BH		
0641			
0645			
0650			
0750	BH		
0755			
0800			
0805			
0810	.25		
0815			
0820			
0823			
0830			
0835			
0840			
0845			
0850			
1150			
1350			
1800			

EQUIPMENT & HOLE DATA			
LOCATION TESTED: MORROW		TICKET NUMBER: 52256400	
DEPTH (ft.): 5212.0		DATE: 11-21-88 TEST NO: 1	
TESTED FOOTAGE: 217.0		TYPE DST: OPEN HOLE	
THUS MEASURED FROM: 15' O.C.L.		HALLIBURTON CAMP:	
PERFS. (ft.):		RT-518	
C CASING SIZE (in): 7.875			
C (ft.): 3468.0			
DEPTH (ft.): 5212.0		TESTER: PHILLIPS	
DEPTH(S) (ft.): 8989.8995			
SURFACE CHOKE (in): 0.25000		WITNESS: JOHN FISHER	
HOLE CHOKE (in): 0.750			
IGHT (lb/gal): 9.20		DRILLING CONTRACTOR:	
COSIDITY (sec): 36		PETERSON DRILLING COMPANY	
ED HOLE TEMP. (°F):			
HOLE TEMP. (°F): 150.0 9208.0 ft			
FLUID PROPERTIES FOR RECOVERED MUD & WATER			
SAMPLER DATA			
Paig AT SURFACE: 500.0			
RESISTIVITY			
SIEVE			
0.400 # 50 °F 19800 ppm			
0.400 # 60 °F 19500 ppm			
0.400 # 60 °F 39000 ppm			
0.400 # 60 °F 36000 ppm			
0.400 # 60 °F 42000 ppm			
0.400 # 60 °F 42000 ppm			
TOTAL LIQUID cc: 2600.0			
HYDROCARBON PROPERTIES			
WATY (HPI):		CUSHION DATA	
APILO (cu.ft. per bbl):		TYPE	
VATY:		AMOUNT	
		WEIGHT	
ERED: 200 FEET OF DRILLING MUD			
7339 FEET OF GAS CUT WATER			
MEASURED FROM TESTER VALVE			

[illegible]

NO: 53256400

ND: 7282 HOUR: 24

TICKET NO: 525256500

CLOCK NO: 13528 HOUR: 24

13.5

13.6

13.7

13.8

13.9

14.0

14.1

14.2

14.3

14.4

14.5

14.6

14.7

14.8

14.9

15.0

15.1

15.2

15.3

15.4

15.5

15.6

15.7

15.8

15.9

16.0

16.1

16.2

16.3

16.4

16.5

16.6

16.7

16.8

16.9

17.0

17.1

17.2

17.3

17.4

17.5

17.6

17.7

17.8

17.9

18.0

18.1

18.2

18.3

18.4

18.5

18.6

18.7

18.8

18.9

19.0

19.1

19.2

19.3

19.4

19.5

19.6

19.7

19.8

19.9

20.0

20.1

20.2

20.3

20.4

20.5

20.6

20.7

20.8

20.9

21.0

21.1

21.2

21.3

21.4

21.5

21.6

21.7

21.8

21.9

22.0

22.1

22.2

22.3

22.4

22.5

22.6

22.7

22.8

22.9

23.0

23.1

23.2

23.3

23.4

23.5

23.6

23.7

23.8

23.9

24.0

24.1

24.2

24.3

24.4

24.5

24.6

24.7

24.8

24.9

25.0

25.1

25.2

25.3

25.4

25.5

25.6

25.7

25.8

25.9

26.0

26.1

26.2

26.3

26.4

26.5

26.6

26.7

26.8

26.9

27.0

27.1

27.2

27.3

27.4

27.5

27.6

27.7

27.8

27.9

28.0

28.1

28.2

28.3

28.4

28.5

28.6

28.7

28.8

28.9

29.0

29.1

29.2

29.3

29.4

29.5

29.6

29.7

29.8

29.9

30.0

30.1

30.2

30.3

30.4

30.5

30.6

30.7

30.8

30.9

31.0

31.1

31.2

31.3

31.4

31.5

31.6

31.7

31.8

31.9

32.0

32.1

32.2

32.3

32.4

32.5

32.6

32.7

32.8

32.9

33.0

33.1

33.2

33.3

33.4

33.5

33.6

33.7

33.8

33.9

34.0

34.1

34.2

34.3

34.4

34.5

34.6

34.7

34.8

34.9

35.0

35.1

35.2

35.3

35.4

35.5

35.6

35.7

35.8

35.9

36.0

36.1

36.2

36.3

36.4

36.5

36.6

36.7

36.8

36.9

37.0

37.1

37.2

37.3

37.4

37.5

37.6

37.7

37.8

37.9

38.0

38.1

38.2

38.3

38.4

38.5

38.6

38.7

38.8

38.9

39.0

39.1

39.2

39.3

39.4

39.5

39.6

39.7

39.8

39.9

40.0

40.1

40.2

40.3

40.4

40.5

40.6

40.7

40.8

40.9

41.0

41.1

41.2

41.3

41.4

41.5

41.6

41.7

41.8

41.9

42.0

42.1

42.2

42.3

42.4

42.5

42.6

42.7

42.8

42.9

43.0

43.1

43.2

43.3

43.4

43.5

43.6

43.7

43.8

43.9

44.0

44.1

44.2

44.3

44.4

44.5

44.6

44.7

44.8

44.9

45.0

45.1

45.2

45.3

45.4

45.5

45.6

45.7

45.8

45.9

46.0

46.1

46.2

46.3

46.4

46.5

46.6

46.7

46.8

46.9

47.0

47.1

47.2

47.3

47.4

47.5

47.6

47.7

47.8

47.9

48.0

48.1

48.2

48.3

48.4

48.5

48.6

48.7

48.8

48.9

49.0

49.1

49.2

49.3

49.4

49.5

49.6

49.7

49.8

49.9

50.0

50.1

50.2

50.3

50.4

50.5

50.6

50.7

50.8

50.9

51.0

51.1

51.2

51.3

51.4

51.5

51.6

51.7

REF

MINUTES

PRESSURE

μP

13.5

13.6

13.7

13.8

13.9

14.0

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

11.5

12.8

11.2

4.8

1

2

3

4

5

6

7

0.0

15.29

4.0

18.62

8.0

20.80

11.0

22.42

3.46

10.6

NOTES		DEPTH	TEMP	TIME	DATE
CUBED IN - CONTINUED					
90.0	3630.1	49.6	40.4	0.258	
100.0	3631.7	51.3	42.3	0.239	
110.0	3633.5	53.8	43.9	0.222	
120.0	3634.3	55.8	45.5	0.207	
130.0	3635.1	57.8	47.1	0.193	
140.0	3635.8	56.3	48.1	0.183	
150.0	3636.1	57.6	49.2	0.173	
160.0	3636.9	58.7	50.2	0.165	
170.0	3639.1	59.4	51.2	0.155	
178.2		58.7	51.9	0.148	

O.D.	I.D.	LENGTH	DEPTH
4.500	3.825	8440.2	
6.500	2.125	401.3	
6.750	3.000	1.0	8842.0
6.500	2.125	117.3	
5.750	2.500	1.0	
5.000	0.750	6.8	
5.000	0.750	5.0	6972.0
5.000	2.250	4.1	6974.0
5.030	1.750	5.0	
5.000	1.000	2.8	
7.000	1.530	5.8	6989.0
7.000	1.530	5.8	6995.0
5.750	1.500	4.3	
5.750	2.500	1.0	
6.500	2.125	175.0	
5.750	2.900	1.0	
5.750	2.870	30.0	
5.750		4.0	5929.0
			9212.0

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO.

5. Indicate Type of Lease

STATE ☐

FEE ☒

6. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"
(FORM C-101) FOR SUCH PROPOSALS.)

RECEIVED
JAN 06 '89

1. Type of Well:

OIL
WELL ☐

GAS
WELL ☒

OTHER

O. C. D.

2. Name of Operator

Terra Resources, Inc.

ARTESIA, OFFICE

3. Address of Operator

10 Desta Drive, Suite 500 West, Midland, Texas 79705

8. Well No.

1

9. Pool name or Wildcat

Boyd (Morrow)

4. Well Location

Unit Letter F : 1513 Feet From The West Line and 1980 Feet From The North Line

Section 31 Township 18S Range 26E NMPM Eddy County

10. Elevation (Show whether DF, RKB, RT, GR, etc.)

3468' GL

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐

PLUG AND ABANDON ☐

TEMPORARILY ABANDON ☐

CHANGE PLANS ☐

PULL OR ALTER CASING ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐

ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐

PLUG AND ABANDONMENT ☒

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Well plugged 11/26/88

530' Drill pipe left in hole - verbally
approved by Mike Stubblefield

Plugs set at:

1. 8783' w/40 sx Cl "H"
2. 7038' w/30 sx Cl "C"
3. 5768' w/30 sx Cl "C"
4. 4397' w/30 sx Cl "C"
5. 2207' w/30 sx CL "C"
6. 1280 s/40 sx Cl "C" w/3% CaCl
7. 301' w/25 sx Cl "C"
8. Surface w/25 sx Cl "C"

Post IO-2
1-13-89
P4A

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Alan D. Means

TITLE

Operations

DATE

1/3/89

TYPE OR PRINT NAME

Alan D. Means

TELEPHONE NO. 915/684-3861

(This space for State Use)

APPROVED BY

Daniel Moore

TITLE

Geologist

DATE

3/30/89

CONDITIONS OF APPROVAL, IF ANY: