


Exhibit B

7 1/16" 5,000 psi WP Flocon LWS Hydraulic Double-Ram BOP

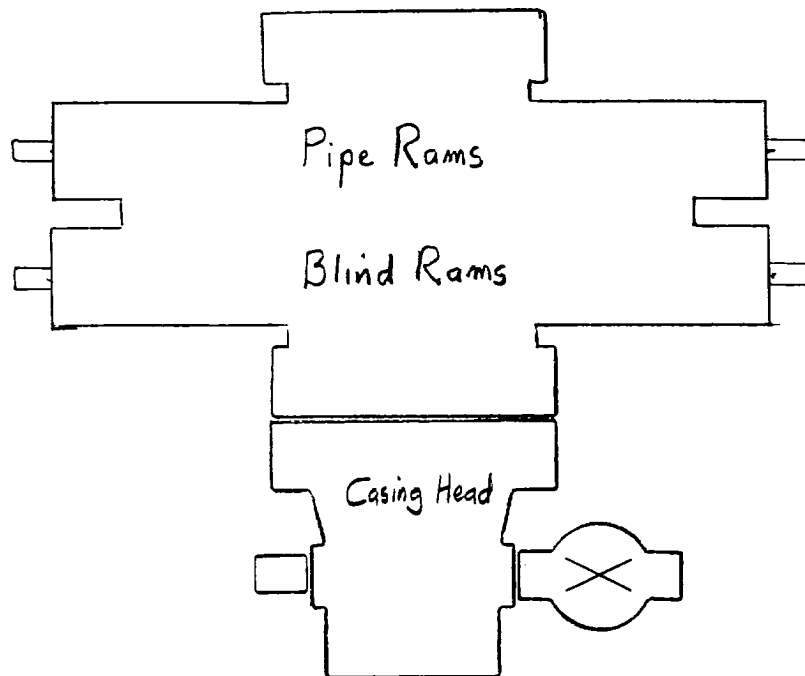

THE FOLLOWING CONSTITUTES MINIMUM BLOWOUT PREVENTER REQUIREMENTS:

1. All preventers to be hydraulically operated with secondary manual closing wheels installed.
2. All connections from operating manifolds to preventers to be steel reinforced hose or steel tube a minimum of one inch in diameter.
3. The closing unit will have sufficient pressure and volume to close all BOP's and retain 200 psi above precharge.
4. All connections to and from preventer to have a pressure rating equal to that of the BOP's.
5. Full opening 5000 psi WP ball type safety valve to be available on rig floor.
6. Operating controls located a safe distance from the rig floor.