

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Mewbourne Oil Company

3. Address and Telephone No.

P.O. Box 5270 Hobbs, New Mexico 88241

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FSL & 1980' FEL
Sec. 1-T18S-R27E

5. Lease Designation and Serial No.

NM-0557371

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Chalk Bluff Fed. Comm. 3

9. API Well No.

30-015-27163

10. Field and Pool, or Exploratory Area

N. Illinois Camp Morrow

11. County or Parish, State

Eddy

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice


TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Cement 7" casing
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Lost complete returns @ 7683'. Dry drilled 8-3/4" hole to 8968'. Ran 226 Jts. of 7", 26# & 29#, N-80 & S-95 grade used API casing and set @ 8968'. Multiple stage cementer @ 6997' and external casing packer @ 7026'. Western cemented the first stage w/350 sks. of Class "H" containing 8 pps CSE + .75% CF-14 + 5 pps Gilsonite + .35% Thrifty Lite. Set ECP and opened DV tool. Cemented 2nd stage w/750 sks. of Class "C" containing 1 pps celloseal + 5 pps gilsonite + 3% salt followed by 100 sks. of Class "H" Neet. Plug down to 6997' @ 2:45 a.m. 12/26/92

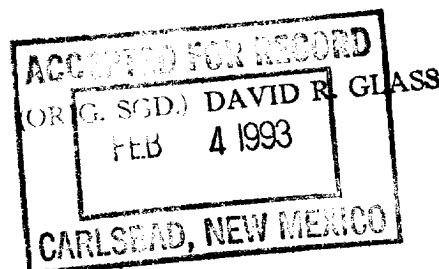

RECEIVED
JAN 25 9 40 AM '93
CARLSBAD AREA OFFICE
BUREAU OF LAND MANAGEMENT

14. I hereby certify that the foregoing is true and correct

Signed Bill Pierce

Title Drilling Superintendent

Date 01/20/93

(This space for Federal or State office use)

Approved by _____

Title _____

Date _____

Conditions of approval, if any: _____