

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

VM OIL CONS COMMISSION
Drawer DD
Artesia, NM 88210

CISF

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Mewbourne Oil Company

3. Address and Telephone No.

P.O. Box 5270 Hobbs, New Mexico 88241 (505) 393-5905

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660' FNL & 510' FWL Unit "D"
Sec. 29-T18S-R30E

5. Lease Designation and Serial No.

NM-27279

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Santo Nino "29" Fed. #2

9. API Well No.

30-015-28134

10. Field and Pool, or Exploratory Area

Santo Nino Bone Spring

11. County or Parish, State

Eddy County, N.M.

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice



TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Run & Cement 5-1/2"
Production Casing

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water
(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

02/18/95 Drilled 7-7/8" hole to 8397' K.B. Ran electric logs and evaluated same. Ran 5-1/2" casing string as follows: Bottom to top; 32 jts. of 17#, L-80 used 8rd, LT&C (1,159') + 156 jts. of 17#, K-55, new LS, 8rd, LT&C (6,378') + 22 jts. of 17#, L-80 used, 8rd, LT&C (855'). Received verbal permission from Shannon Shaw with Carlsbad BLM office to run this casing design. Halliburton cemented w/750 sks. Class "H" Lite containing 8#/sk. salt + 5#/sk. gilsonite + 1/2#/sk. flocele (12.4#/gal., 2.17 cu. ft./sk.) followed by 400 sks. of Class "H" containing .3% Halad 322 + .3% Halad 344 + 5#/sk. salt (16.0#/gal., 1.18 cu. ft./sk.) Plug down @ 1:15 a.m. 02/19/95. Set slips and released rig @ 6:00 a.m. 02/19/95.

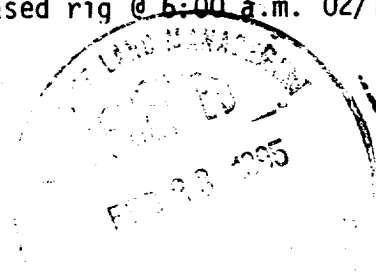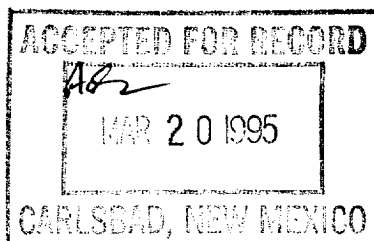

14. I hereby certify that the foregoing is true and correct.

Signed

Red Perry

Title Drilling Superintendent

Date 02/22/95

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any: