

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CONTACT RECEIVING
OFFICE FOR NUMBER
OF COPIES REQUIRED
(Other instructions on re-
verse side)

BLM Roswell District
Modified Form No.
NMD60-3160-4

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>		5. LEASE DESIGNATION AND SERIAL NO. LC-029415-B	
2. NAME OF OPERATOR W.A. & E.R. Hudson, Inc.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME	
3. ADDRESS OF OPERATOR P.O. Box 9, Maljamar, NM 88264-0009		7. UNIT AGREEMENT NAME	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface 2620' FWL and 1300' FNL of Sec. 25		8. FARM OR LEASE NAME PUCKETT B	
14. PERMIT NO.		9. WELL NO. 33	
15. ELEVATIONS (Show whether DF, RT, GR, etc.)		10. FIELD AND POOL, OR WILDCAT Malj. G-SA	
		11. SEC., T., R., M., OR BLK. AND SURVEY OR ARMA Sec. 25, T17S, R31E	
		12. COUNTY OR PARISH Eddy	
		13. STATE NM	

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
(Other) ☐

PULL OR ALTER CASING ☐
MULTIPLE COMPLETION ☐
ABANDON* ☐
CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐

FRACTURE TREATMENT ☐

SHOOTING OR ACIDIZING ☐

(Other) Cement Casing ☐

REPAIRING WELL ☐
ALTERING CASING ☐
ABANDONMENT* ☐

☒


(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROMISED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

On September 22, 1995, cemented 13 3/8" OD 48# J-55 casing at 611' with 700 sx. premium plus cement with 2 % Ca Cl. cement circulated to surface.

On September 24, 1995, cemented 8 5/8" OD 24# J-55 casing at 1908' with 500 sx. Halliburton light and 200 sx. premium plus with 2% Ca Cl. cement circulated to surface.

On September 29, 1995, cement 5 1/2" OD 15.5# J-55 casing @ 4054' with 200 sx. Halliburton light and 650 sx. premium plus. Cement circulated to surface.

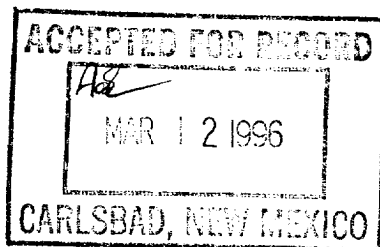

RECEIVED
FEB 28 10 55 AM '96
OIL CONTROL
DISTRICT

18. I hereby certify that the foregoing is true and correct

SIGNED J.B. Smith TITLE Prod. Supt.

DATE Oct. 30, 1995

(This space for Federal or State office use)

APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY:

TITLE _____

DATE _____