

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE

FORM APPROVED

(See other instructions on reverse side)

WELL COMPLETION OR RECOMPLETION REPORT AND LOG VISIO

1a. TYPE OF WELL: OIL WELL ☒ GAS WELL ☐ DRY ☐ **Oil Surface**

1b. TYPE OF COMPLETION: NEW WELL ☒ WORK OVER ☐ DEEP EN ☐ PLUG BACK ☐ DIFF RESVR ☐ Other

2. NAME OF OPERATOR

DEVON ENERGY CORPORATION (NEVADA)

3. ADDRESS AND TELEPHONE NO.

20 N. BROADWAY, SUITE 1500, OKC, OK 73102-8260 (405) 235-3611

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)*

At surface 790' FNL & 2290' FWL, Unit "C"

At top prod. interval reported below (SAME)

At total depth (SAME)

14. PERMIT NO.

DATE ISSUED

4/24/97

12. COUNTY OR PARISH

Eddy County

13. STATE

NM

15. DATE SPUDDED

6/12/97

16. DATE T.D. REACHED

6/18/97

17. DATE COMPL. (Ready to prod.)

9/6/97

18. ELEVATION OF TOP OF CASING, RT, GR, ETC.)*

KB 3602; GL 3593; DF 3601

19. ELEV. CASINGHEAD

20. TOTAL DEPTH, MD & TVD

2650'

21. PLUG, BACK T.D., MD & TVD

2604'

22. IF MULTIPLE COMPL., HOW MANY*

NA

23. INTERVALS

DRILLED BY

ROTARY TOOLS

X

CABLE TOOLS

24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)*

San Andres - 1654'-2364'

25. WAS DIRECTIONAL SURVEY

MADE

No

26. TYPE ELECTRIC AND OTHER LOGS RUN

LDN/CNL/DLL/MSFL/GR; CBL

27. WAS WELL CORED

No

28. CASING RECORD (Report all strings set in well)

CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
8-5/8" J-55	24#	1150'	12-1/4"	surf; 350 sxs lite & 200 sxs "C"	NA
5-1/2" J-55	15.5#	2649'	7-7/8"	surf; 225sxs lite C & 275 sxs "C"	NA

29. LINER RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-7/8"	2098'	(OET)

30. TUBING RECORD

31. PERFORATION RECORD (Interval, size and number)

1654'-1672' USA (2.40" EHD holes)

1880'-2001' ALPHA (9.40" EHD holes)

2114'-2143' "A" (3.40" EHD holes)

2158'-2254' "B" (7.40" EHD holes)

2274'-2283' "C" (6.40" EHD holes)

2347'-2364' "D" (3.40" EHD holes)

32. ACID SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
1654'-2364'	2500 gals of 15% NeFe acid
1654'-2364'	180,000 gals gel water + 6000# 100 mesh sand
	+ 267,000 20/40 Brady sand and 20,000#
	16/30 RC sand.

33. PRODUCTION

DATE: FIRST PRODUCTION 9/12/97

PRODUCTIONS METHOD I (Flowing, gas lift, pumping—size and type of pump) Pumping (2-1/2" x 2" x 12' RWTC Pump)

WELL STATUS (Producing or shut-in) Producing

DATE OF TEST 9/28/97

HOURS TESTED 24

CHOKE SIZE

PROD'N FOR TEST PERIOD

OIL-BBL. 94

GAS-MCF. 94

WATER-BBL. 209

GAS-OIL RATIO 1000/1

FLOW. TUBING PRESS.

CASING PRESSURE

CALCULATED 24-HOUR RATE

OIL-BBL. 94

GAS-MCF. 94

WATER-BBL. 209

OIL GRAVITY-API (CORR.) 38

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)

Vented (To be connected)

35. LIST OF ATTACHMENTS

Logs, Deviation Surveys

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED

Crystal Thornton

TITLE ENGINEERING TECHNICIAN

DATE October 1, 1997

*(See Instructions and Spaces for Additional Data on Reverse Side)

Title: 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

1991 OCT -6 A 9:45

OFFICE OF LAND MANAGEMENT
ROSWELL OFFICE

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill stem, tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):					38. GEOLOGIC MARKERS		
FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.		NAME	TOP	
						MEAS. DEPTH	TRUE VERT. DEPTH
Premier Sand	1539'	1583'	sandstone		Bowers	664'	+2938
San Andres	1583'	2650'	dolomite		Queen	858'	+2744
					Grayburg	1539'	+3602
					Premier	1539'	+2063
					San Andres	1583'	+2019
		DEPTH	ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.. (continued from the front)				
		NA					

RECEIVED

1911 OCT -6 A 9 45

U.S. GEOLOGICAL SURVEY
ROSWELL OFFICE

L & M DRILLING, INC.

OIL WELL DRILLING CONTRACTORS
PO BOX 1370 ARTESIA, NEW MEXICO 88211-1370
(505) 746-4405 746-3518 748-2205

June 20, 1997

Devon Energy Corporation
20 North Broadway, Suite 1500
Oklahoma City, OK 73102-8260

RE: Falcon 3C Federal #4
790' FNL & 2290' FWL
Sec. 3, T18S, R27E
Eddy County, New Mexico

Gentlemen:

The following is a Deviation Survey for the above captioned well.

DEPTH	DEVIATION
145'	1/2°
327'	3/4°
503'	1°
678'	1 1/2°
852'	1°
1008'	1 1/4°
1133'	1/2°
1419'	3/4°
1885'	1 1/4°
2230'	1 1/2°
2636'	1 1/4°
2650'	1 1/4°


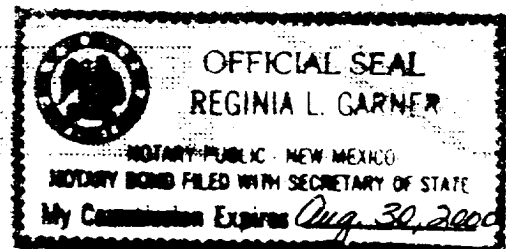
Very truly yours,



Eddie C. LaRue
Vice President

STATE OF NEW MEXICO
COUNTY OF EDDY

The foregoing was acknowledged before me
this 20th day of June, 1997.


Notary Public

RECEIVED

1971 OCT -6 A 9 44

OFFICE OF LAND MANAGEMENT
ROSWELL OFFICE