

Wellbore Data

Travis ATR 24 State Com #1
Unit K-Sec 24-T 18S-R 28E
1980' FSL & 1980' FWL, Eddy County, NM
Palmillo Draw Atoka
API #30-015-29658

prop: #852470-001

PBTD: 10,450'


TD: 11,260'

PBTD DATE: 11/11/99

TD DATE: 7/28/97

COMPLETED: 11/17/99

PERFS: 10,224'-10,242'

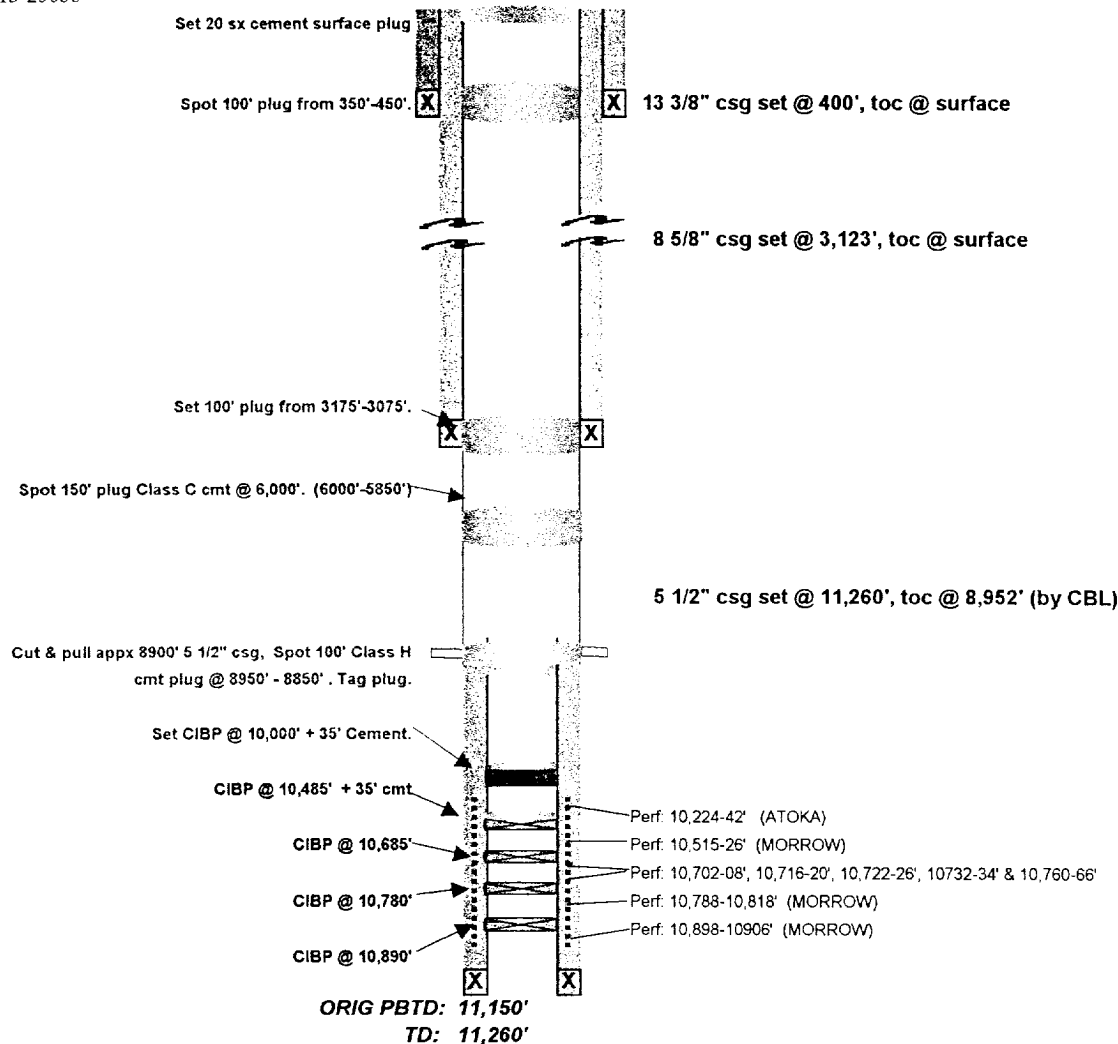

DRAWING NOT TO SCALE

PLUGGING PROCEDURE:

1. Set CIBP @ 10,000' + 35' Cement.
2. Circ 9# mud.
3. Cut & pull appx. 8900' 5 1/2" csg. Spot 100' Class H cmt plug @ 8950-8850' Tag
4. Spot 150' plug Class C cmt @ 6,000-5,850'
5. Set 100' plug from 3175'-3075'.
6. Spot 100' cmt plug @ 350-450'
7. Set 20 sx cement surface plug. Install dry hole marker