

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

113
Artesia, NM

34 FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1650' FSL & 1200' FWL of Section 10-T18S-R29E (Unit L, NWSW)

5. Lease Designation and Serial No.

LC-056014

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Loco ASI Federal Com #1

9. API Well No.

30-015-30094
30-015-30275

10. Field and Pool, or Exploratory Area

Undesignated Morrow

11. County or Parish, State

Eddy Co., NM

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice


TYPE OF ACTION

☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Resume drilling, surface casing and cement
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Resumed drilling a 17-1/2" hole with rotary tools at 10:00 AM 6-16-98.

TD 354'. Reached TD at 6:15 PM 6-16-98. Ran 8 joints of 13-3/8" 48# H-40 8rd ST&C (358.52') of casing set at 354'. 1-Texas Pattern notched guide shoe set at 354'. Insert float set at 309'. Cemented with 400 sacks Class C and 2% CaCl2 (yield 1.34, weight 14.8). PD 11:15 PM 6-16-98. Bumped plug to 500 psi, OK. Circulated 68 sacks. WOC. Cut off and welded on flow nipple. Drilled out at 12:45 PM 6-17-98. WOC 13 hours and 45 minutes. Reduced hole to 11". Resumed drilling. NOTE: Cementing witnessed by Jim Amos w/BLM-Carlsbad.

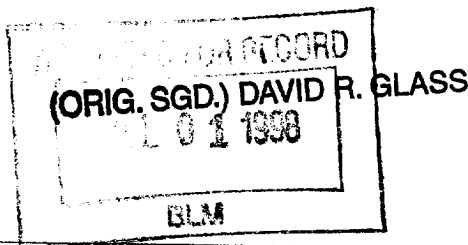

14. I hereby certify that the foregoing is true and correct.

Signed Rusty Kline Title Operations Technician

Date June 25, 1998

(This space for Federal or State office use)

Approved by _____
Conditions of approval, if any:

Title _____ Date _____

RECEIVED

JUN 26 38

BLM
ROSWELL, NM

1