APPROVED BY

UNITED STATES NO DEPARTMENT F THE INTERIOR

BUREAU OF LAND MANAGEMENT

Al	PPLICATION FOR P	ERMIT TO DRILL OR				274 IAN, ALLOTTEE OR T			
la TYPE OF WORK:	DRILL 🛛		NA NA						
						7.UNIT AGREEMENT NAME			
b. TYPE OF WELL:	GAS Other	SINGLE ZONE	MULTIPLE	n L					
2 NAME OF OPERA		2000	ZONE			R LEASE NAME, WELL 'ederal #8			
2 MAINE OF OFFICE		RPORATION (NEVADA)	613	う し			255C		
3. ADDRESS AND TI			415	/	9.API WE カイ・	-015-30	D (X K		
	20 N. BROADWAY, SU	UITE 1500, OKC, OK 73102	(405) 235-3611	·		AND POOL, OR WILD	CAT		
4. LOCATION OF WE	LL (Report location clearly and	d in accordance with any State re	quirements)*]	Red Lak	e; Q-GB-SA	51300		
	FNL & 330' FWL, Unit "D"	L// 808	SECT TO			T.,R.,M.,OR BLOCK			
At top proposed proc	DRTHODOX LOCAL L. zone (SAME)	TION LOTY LIKE	APPROVAL	-	Section (6-T18S-27E			
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE* Approximately 7 miles southeast of Artesia, NM						12. COUNTY OR PARISH 13. S Eddy County New			
Approximately / miles	southeast of Africaia, tvivi			13. * .	EGGY C	.ouncy	Mexico		
15.DISTANCE FROM PROPO		16.NO. OF ACRES IN LEAS	SE	Dr.		17.NO. OF ACRI			
LOCATION TO NEAREST PROPERTY OR LEASE I		159	00	A ECEIVED		TO THIS WE	LL		
(Also to nearest drlg, unit li	ne if any)			ARTESIA					
18.DISTANCE FROM PROPO TO NEAREST WELL, DE		19.PROPOSED DEPTH 2800'		-014		20 ROTARY OR C	CABLE TOOLS*		
OR APPLIED FOR, ON									
21.ELEVATIONS (Show who GR 3361'		OSWELL CONTROL	LED WATE	RBASIN		approx. Date Work arch 1, 1998	WILL START*		
						······································			
SIZE OF HOLE	GRADE, SIZE OF CASING	PROPOSED CASING AN WEIGHT PER FOOT	D CEMENTING I	PROGRAM SETTING DEPTH		CULANTITY	OF CEMENT		
17 1/2"	14"	Conductor	40'			Redimix			
12 1/4"	8 5/8", J-55	24 ppf	1150'	WITNE	<u> </u>	350 sx Lite + 200	av Class C		
7 7/8"	5 1/2", J-55	15.5 ppf	2800'	WIIIE	<i>9</i> €	150 sx Lite + 350			
, ,, ,	3 112 , 3-33	13.5 ррг	2000		l	130 3x Lite + 330	SA. CIASS C		
Drilling Program Surface Use and Opera Exhibit #1 - Blowout P Choke M Exhibit #2 - Location a Exhibit #3 - Planned A Exhibit #4 - Wells Wit Exhibit #5 - Production Exhibit #6 - Rotary Rig	ating Plan Prevention Equipment/ anifold and Elevation Plat access Roads hin a One Mile Radius on Facilities Plan g Layout sign Parameters and Factors	operations cond Bond Coverage BLM Bond Fil	The undersigned accepts all applicable terms, conditions, stipulation, and restrictions concer operations conducted on the leased land or portion thereof, as described above. Bond Coverage: Nationwide BLM Bond File No.: CO-1104 Post TD-1 2-17-98 APPROVAL SUBJECT TO GENERAL REQUIREMENTS AND SPECIAL STIPULATIONS ATTACHED						
		RAM: If proposal is to deepen, inent data on subsurface location							
	E. L. Bethos		L. BUTTROSS, JR Strict Engin		3	1/7/98	<u> </u>		
"(This space for Fede	eral or State office use)								
PERMIT NO			APPRO	VAL DATE					
	not warrant or certify that the app	plicant holds legal or equitable title to	those rights in the s	ubject lease which wo	uld entitle	the applicant to cond	uct operations		
thereon. CONDITIONS OF AP	PROVAL, IF ANY:								
	·	aner A	_A n	M. MINERALS	S		2		
((DRIG. SGD.) ARMANDO A. L	with L	11.7	AND DESCRIPTIONS		5 2	10 1 A		

See Instructions On Reverse Side

Z1 E G 8-107 800

DISTRICT I P.O. Box 1980, Hobbs, NM 88240

State of New Mexico

Energy, Minerals and Natural Resources Department

Form C-102
Revised February 10, 1994
Instruction on back
Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - 3 Copies

DISTRICT II P.O. Drawer DD, Artesia, NM 88210

1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT III


OIL CONSERVATION DIVISION

P.O. Box 2088 Santa Fe, New Mexico 87504-2088


☐ AMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION PLAT

		•	WELL LO	CATION	AND ACREA	AGE DEDICATI	ON PLAT				
API Number			Pool Code Pool Name								
						Re	d Lake (O-G	B-SA)			
Property	Code				Property Nan	ne ne	•	Well Na	ımber		
		FRED "6" FEDERAL					8				
OGRID No.			Operator Name					Elevation			
		<u> </u>		DEVO	N ENERGY C	ORPORATION		336	1'		
					Surface Loc	ation					
UL or lot No.	Section	Township	Range	Lot ldn	Feet from the	North/South line	Feet from the	East/West line	County		
D	6	18 S	27 E		230	NORTH	330	WEST	EDDY		
	-		Bottom	Hole Lo	cation If Diffe	erent From Sur	face	•			
UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County		
Dedicated Acre	a l Taint a	or Infill Co	nsolidation (Cada A	der No.				L		
Dedicated Acre	s Joint 6	or milli	usondarion (Lode Or	der No.						
											
NO ALLO	OWABLE V					INTIL ALL INTER APPROVED BY		EEN CONSOLIDA	TED		
355.01 <u>3374.4</u>		ON A 1	ON BIAN	DAILD OI	VII HAS DEEN	AITROVED BI	THE DIVISION				
							OPERATO	OR CERTIFICAT	ION		
	330'				!						
346.5 . 3354.	n. / /							ny certify the the inj in is true and compl			
	* / /				1			wledge and belief.			
/°/	/ /				1						
/ / /				ł	i			_ 44			
	///				i		11 E. I	Butto	معد الد		
[_//_	-//			L			Signature	V=2242	0		
	1						E.L. 1	Buttross, Jr	•		
	1				i		Printed Nam	ne			
						Distr	District Engineer				
							Title				
					!		<u>January 6, 1998</u>				
	1			[ļ		Date				
							SURVEY	OR CERTIFICAT	ION		
	i				i		I hereby certif	y that the well locati	on shown		
	i						1 1	as plotted from field	-		
				Į.	i		L I	made by me or nd that the same is	-		
	1				i I		11 -	se best of my belief			
	, 				1						
	,				, 1			mber 26, 1997			
					i I		Date Survey				
				T — — -			Professional	Surveyor			
	!				l I		1 / 68	H MEX			
	!				!		11.3/12	W. I. W.	W.s		
	į				1		11 71 = 1/4	7977			
	1				1		115 14.0	No. 757624	·		
	!				l		Certification	o. Gary L. Sorts	7977		
	1				1		100	Frequenal LAND			
				<u> </u>	<u></u>			ASIN' SUPPLYS			

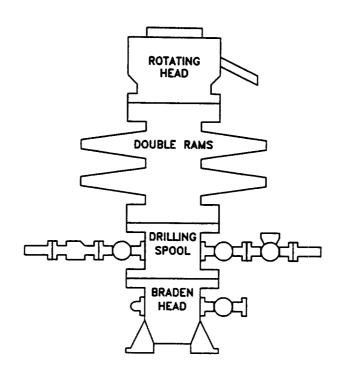

CHOKE MANIFOLD REQUIREMENT (2000 psi WP)

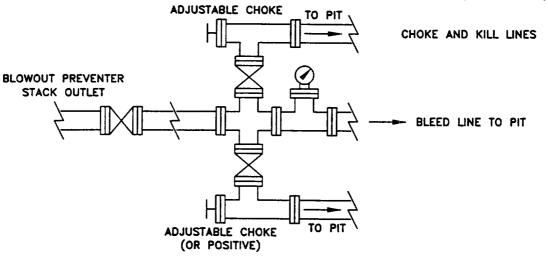

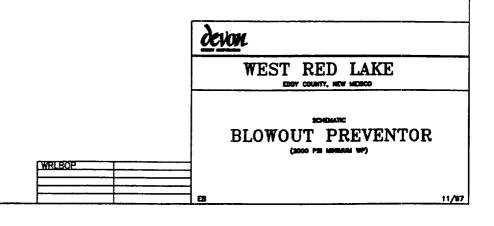

Attachment to Exhibit #1 NOTES REGARDING BLOWOUT PREVENTORS

Fred 6 Federal #8 Eddy County, New Mexico

- 1. Drilling nipple will be constructed so it can be removed mechanically without the aid of a welder. The minimum internal diameter will equal BOP bore.
- 2. Wear ring will be properly installed in head.
- 3. Blowout preventor and all associated fittings will be in operable condition and tested to 1000 psi with the rig pump.
- 4. All fittings will be flanged.
- 5. A full bore safety valve with proper thread connections will be available on the rotary rig floor at all times.
- 6. All choke lines will be anchored to prevent movement.
- 7. All BOP equipment will be equal to or larger in bore than the internal diameter of the last casing string.
- 8. Will maintain a Kelly cock attached to the Kelly.
- 9. Hand wheels and wrenches will be properly installed and tested for safe operation.
- 10. All BOP equipment will meet API standards and include a minimum 40 gallon accumulator having two independent means of power to initiate closing operation.