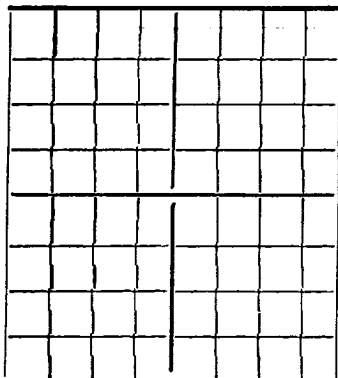


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE

Dooley & Haynes, Company or Operator, Artesia, New Mexico, Address
Martin, Lease, Well No. 1, in 3E NW of Sec. 9, T. 19
R. 35, N. M. P. M., Wilscat Field, 35dy County.
Well is 3510 feet south of the North line and 2970 feet west of the East line of Section 9
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is William A. Martin, et al, Address Artesia, New Mexico
If Government land the permittee is, Address
The Lessee is, Address
Drilling commenced August 1940. Drilling was completed October 25 1940.
Name of drilling contractor Dooley & Haynes, Address Artesia, New Mexico
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from none to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 130 to 165 feet. 155' level
No. 2, from 435 to 498 feet. 155' level
No. 3, from 303 to 612 feet. 155' level
No. 4, from 970 to 975 feet. 155' level

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
8"	24#		S.H.	315'				Hold cave
7"	20#		S.H.	590'				Hold cave
5 3/16 14#			S.H.	975'				Shut off water

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
5 1/8"	5 3/16	975'	135	Gibson &		110 sacks, total
			(Total)	Halliburton		
				(Circulating)		

PLUGS AND ADAPTERS

Heaving plug—Material none Length Depth Set
Adapters—Material none Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		none				

Results of shooting or chemical treatment.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 0 feet to 1000 feet, and from feet to feet

PRODUCTION

Put to producing none, 19.
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

W. P. Black, Driller Francis Tice, Tool Dresser, Driller
W. A. Nelson, Driller Bill Ballon, Tool Dresser, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this day of April, 1941.
Notary Public. Representing Dooley & Haynes, Company or Operator.
My Commission expires November 20, 1943.
Address Artesia, New Mexico.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	70		Fill, Boulder, Grp & Gravel
70	180		Red clay, Red clay, yellow clay
180	185		White gravel
185	235		Red Clay
235	245		Red Rock
245	249		Red Sand
249	255		Rock shell
255	280		White shale
280	287		Red Clay
287	355		Red Clay, shale, red sand, blue shale, lime
355	390		Line
390	400		Red clay
400	415		Line
415	420		Red clay
420	440		Line
440	447		Red clay
447	485		Line
485	538		Sand
538	541		Line
541	585		White sand
585	643		Line
643	645		Soft sand rock
645	660		Soft gray lime
660	660		Soft sand rock
660	670		Soft gray lime
670	685		Red shale
685	725		Line
725	775		Sand rock, hard rock
775	778		Red sand
778	784		Chalk Rock
784	810		White lime
810	813		Sand
813	835		Line
835	940		Chalk rock
940	1000		Line
1000			Total depth