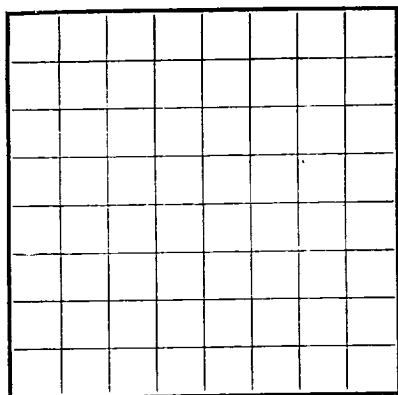


U. S. LAND OFFICE **Las Cruces**
SERIAL NUMBER **068353A**
LEASE OR PERMIT TO PROSPECT

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY**RECEIVED**
DEC 1 1958
U. S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICO

LOG OF OIL OR GAS WELL

Company **NEARBURG & INGRAM** Address **P.O. Box 847, Roswell, N. Mex.**
Lessor or Tract **Van Hook** Field **Wildcat** State **New Mexico**
Well No. **1980** Sec. **30** T. **19S** R. **25E** Meridian **N.M.P.M.** County **Eddy**
Location **1980** ft. (N.) of **8** Line and **660** ft. (W.) of **Section** Elevation **3543'**
(Derrick floor relative to sea level)The information given herewith is a complete and correct record of the well and all work done thereon
so far as can be determined from all available records.Signed **Tom L. Ingram**Date **November 28, 1958** Title **Partner**

The summary on this page is for the condition of the well at above date.

Commenced drilling **October 9**, 19**58** Finished drilling **November 23**, 19**58**OIL OR GAS SANDS OR ZONES
(Denote gas by G)No. 1, from _____ to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
8-5/8 24			Spring	1220	HOWC				Surface
HE LOGA OF OIL OR GAS WELL									

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
8-5/8 1220		550	Pumps		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from **0** feet to **6245** feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

PA 11-23-58, 19____ Put to producing _____, 19____The production for the first 24 hours was _____ barrels of fluid of which _____% was oil; _____%
emulsion; _____% water; and _____% sediment. Gravity, °Bé. _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

S. P. Yates Drilling Co., Driller _____, Driller
_____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	670	670	Sand, anhydrite and gravel
670	2190	1520	Dolomite
2190	3570	1380	Sand and dolomite
3570	5230	1660	Lime and dolomite
5230	5450	220	Sand
5450	6245	795	Lime, sand and shale
		6245	

DST 5669-5719' - Open 45 minutes, recovered 90' mud, FP 55, 15 min
SIP 485.
DST 5866-5950' - Open 2 1/2 hrs, QTS 2", MTS 14", Flw est. 30-40 bbls.
sulphur wtr per hour, Rev. out wtr and gas. FP 1135-
1400, 30 min SIP 4810.
DST 6180-6245' - Open 15 minutes, recovered 60' mud, FP 55, 15 minute
SIP 70

