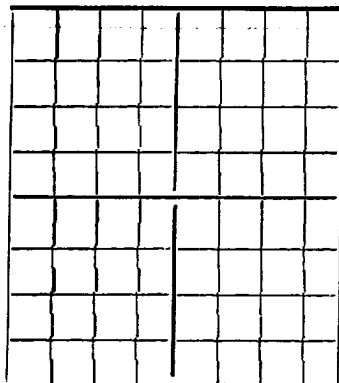


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE

S. P. Yates Company or Operator 215 Ward Bldg., Artesia, New Mexico Address
Taylor Ross Well No. 1 in 22NW SW of Sec. 22, T. 19
Lease
R. 25, N. M. P. M., Wildcat Field, Eddy County.
Well is 1650 feet south of the North line and 990 feet east west of the East line of Section 22
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Taylor Ross, Address Lakewood, New Mexico
If Government land the permittee is, Address
The Lessee is S. P. Yates, Address Artesia, New Mexico
Drilling commenced November 2, 1940. Drilling was completed January 17, 1941
Name of drilling contractor R. I. Willson, Address Roswell, New Mexico
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 1005 to 1027 Shell amount of gas, soft lime.
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 242 to 251 feet.
No. 2, from 615 to 653 Broken feet.
No. 3, from 930 to 933 feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
6"				432'				
7"				923'				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		none				

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 500 feet, and from feet to feet
Cable tools were used from 432 feet to 1200 feet, and from feet to feet

PRODUCTION

Put to producing, 19.
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

, Driller, Driller
, Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Antesia, New Mexico January 20, 1941
Subscribed and sworn to before me this 20th day of January, 1941
Name S. P. Yates
Position Operator
SEAL J. Don Hudgens Notary Public. Representing S. P. Yates Company or Operator
My Commission expires October 15, 1941 Address 215 Ward Bldg. Artesia, N.M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	18		Caliche
18	28		Rock
28	31		Clay
31	49		Lime
49	55		Clay
55	67		Gyp
67	70		Clay
70	87		Anhy and lime
87	94		Clay
94	108		Sand gravel
108	147		Rock & Sand
147	165		Anhy & clay
165	248		Rock & shale gray
248	251		Sand rock water
251	258		Anhy
258	267		Red clay
267	279		Sandy shale & lime
279	322		Sand rock
322	354		Lime & shale, blue shale
354	615		Lime
615	622		Sand water (Sulphur water)
622	645		Gray lime
645	653		Water sand
653	690		Lime
690	692		Water sand
692	830		Lime
830	833		Water sand
833	1200		Lime some water 1193-1200
1200			Total depth