


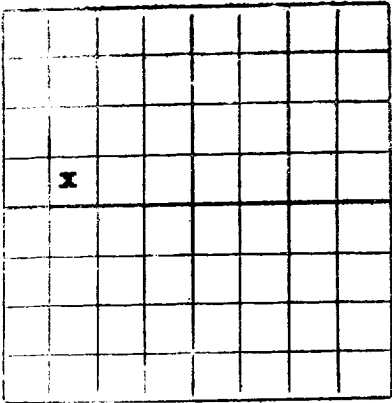

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

AREA 640 ACRES
LOCATE WELL CORRECTLY

J. F. Bedingfield L. T. Lewis
(Company or Operator) (Lease)
Well No. 1, in SW 1/4 of NW 1/4, of Sec. 34, T. 19S, R. 26E, NMPM.
Undesignated Pool, Eddy County.
Well is 2310 feet from North line and 990 feet from West line
of Section 34. If State Land the Oil and Gas Lease No. is
Drilling Commenced April 21, 1956 Drilling was Completed September 6, 1956
Name of Drilling Contractor Owen Haines, Artesia, N.M. Surface to 1280'. Company tools to completion.
Address
Elevation above sea level at Top of Tubing Head 3277.6'. The information given is to be kept confidential until
Not confidential, 19

OIL SANDS OR ZONES

No. 1, from 1140 to 1150 No. 4, from to
No. 2, from 1170 to 1180 No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 50' to 65' feet
No. 2, from 1594' to 1600' feet
No. 3, from to feet
No. 4, from to feet

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
12-3/4	50 lb	Used	378'	eq.	80'	None	Shut off cave
8-5/8	24 lb	New	1280'	Reg.	Pulled shoe	None	Shut off water & m
7	20 lb	New	1645'	Reg.	Pulled shoe	None	Shut off water

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. BAGS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15"	12-3/4	378'	None	Rotary hole		Hole full
11"	8-5/8	1280'	None	Rotary hole		Hole full
8-5/8"	7	1645"	None	Throw in clay in surface formation		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

None
Result of Production Stimulation None
Depth Cleaned Out

1. ORDER OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 1280 feet, and from 1280 feet to 2006 feet.
 Cable tools were used from 1280 feet to 2006 feet, and from 2006 feet to 2006 feet.

PRODUCTION

Put to Producing Not producing, 19

OIL WELL: The production during the first 24 hours was barrels of liquid of which % was oil; % was emulsion; % water; and % was sediment. A.P.I. Gravity.

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.	T. Devonian.	T. Ojo Alamo.
T. Salt.	T. Silurian.	T. Kirtland-Fruitland.
B. Salt.	T. Montoya.	T. Farmington.
T. Yates.	T. Simpson.	T. Pictured Cliffs.
T. 7 Rivers.	T. McKee.	T. Menefee.
T. Queen. 612	T. Ellenburger.	T. Point Lookout.
T. Grayburg.	T. Gr. Wash.	T. Mancos.
T. San Andres. 1260	T. Granite.	T. Dakota.
T. Glorieta.	T.	T. Morrison.
T. Drinkard.	T.	T. Penn.
T. Tubbs.	T.	T.
T. Abo.	T.	T.
T. Penn.	T.	T.
T. Miss.	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	50	50	Soil, caliche	1594	1608	14	Dolomite
50	65	15	Caliche, gravel	1608	1645	37	Water, broken gray lime
65	217	152	Shale, broken anhydrite	1645	2006	361	Gray & brown lime, dolomite
217	355	138	Broken lime, shale breaks	2006			Total depth
355	362	7	Red clay				
362	440	78	Clay, lime shells				
440	605	165	Red clay, anhydrite, shells				
605	700	95	Red sand, lime shells				
700	720	20	Porous, water stained				
720	770	50	Broken anhydrite, shells				
770	795	25	Reefy, porous				
795	860	65	Broken anhydrite, lime				
860	875	15	Gray shale				
875	915	40	Broken anhydrite, lime				
915	1140	225	Lime, anhydrite, shale				
1140	1180	40	Brown lime, slt. oil stain				
1180	1280	100	Broken lime, anhydrite				
1280	1300	20	Lime				
1300	1321	21	White lime				
1321	1338	17	Gray lime				
1338	1440	102	Brownish gray lime				
1440	1446	6	Broken gray lime				
1446	1529	83	Gray & brown lime				
1529	1551	22	White lime				
1551	1564	13	Brownish gray lime				
1564	1594	30	White & gray lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

December 13, 1956 (Date)
 Company or Operator J. E. Bedingfield Address Box 563 Artesia, New Mexico
 Name J. E. Bedingfield Position or Title Owner