

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

RECEIVED

WELL RECORD NOV 10 1959

O. O. O.

ARTESIA OFFICE

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

AREA 640 ACRES  
LOCATE WELL CORRECTLY

E. P. CAMPBELL

(Company or Operator)

MOUTRAY

(Lease)

Well No. 1, in NE 1/4 of SE 1/4, of Sec. 32, T. 19 South, R. 26 East, NMPM.

Wildcat Pool, Eddy County.

Well is 1980 feet from South line and 660 feet from East line

of Section 32. If State Land the Oil and Gas Lease No. is

Drilling Commenced August 31, 1959 Drilling was Completed November 1, 1959

Name of Drilling Contractor E. P. Campbell

Address 1603 Broadway, Lubbock, Texas

Elevation above sea level at Top of Tubing Head est. 3320' The information given is to be kept confidential until

not confidential, 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet

No. 2, from to feet

No. 3, from to feet

No. 4, from to feet

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8-5/8"	20#	New	658'	Haliburton float shoe			Surface string
4-1/2"	9.5#	New	2000'	"	" "	908-920'	Prod. string
						1208-1220'	

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
9-5/8"	7"	658'	70	pump & plug		mudded to surface
6-3/4"	4-1/2"	2000'	250	pump & plug		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Result of Production Stimulation

Depth Cleaned Out 1834 feet

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 1834 feet, and from feet to feet.  
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Plugged & Abandoned November 1, 1959  
Put to Producing

OIL WELL: The production during the first 24 hours was barrels of liquid of which % was  
was oil; % was emulsion; % water; and % was sediment. A.P.I.  
Gravity.

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of  
liquid Hydrocarbon. Shut in Pressure lbs.  
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):


Southeastern New Mexico

Northwestern New Mexico

T. Anhy	T. Devonian	T. Ojo Alamo
T. Salt	T. Silurian	T. Kirtland-Fruitland
B. Salt	T. Montoya	T. Farmington
T. Yates	T. Simpson	T. Pictured Cliffs
T. 7 Rivers	T. McKee	T. Menefee
T. Queen	T. Ellenburger	T. Point Lookout
T. Grayburg	T. Gr. Wash	T. Mancos
T. San Andres	T. Granite	T. Dakota
T. Lovington sd. 1250'	T.	T. Morrison
T. Drinkard	T.	T. Penn
T. Tubbs	T.	T.
T. Abo	T.	T.
T. Penn	T.	T.
T. Miss	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
			The following plugs were used:  1125-1200' with 10 sacks cement, 925-825 feet with 10 sacks cement, 720-550 feet with 20 sacks cement, 175-125 feet with 20 sacks cement, and 5 sacks cement @ surface with steel marker.				
0	720	720	Vally fill, soil, sand & gravel				
720	1150	430	Dolomite & sandstone				
1150	1250	100	Lime				
1250	1350	100	Limy sand				
1350	1834	484	Dolomite				

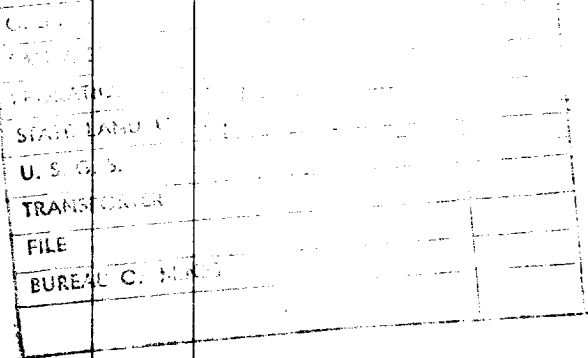

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

November 16, 1959 (Date)  
Company or Operator E. P. Campbell Address 1603 Broadway, Lubbock, Texas  
Name Position Title Geologist