


N

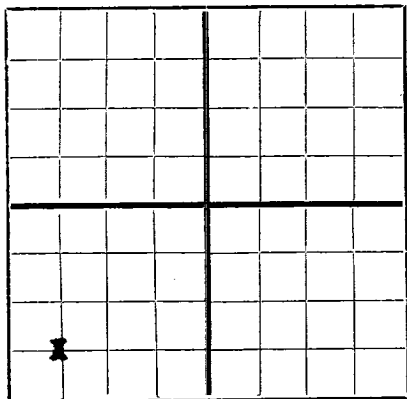

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Jerry Curtis
Company or Operator

Booker Bida., Artesia, New Mexico
Address

State 5-2154 Well No. 1 in 32 of Sec. 1 T. 19S
Lease

R. 275 N. M. P. M. Artesia Field, 32dy County.

Well is 4620 feet south of the North line and 4620 feet west of the East line of Sec. 1-19S-275

If State land the oil and gas lease is No. 5-2154 Assignment No. 28

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Jerry Curtis Address Artesia, New Mexico

Drilling commenced March 26 19 49 Drilling was completed May 16 1949

Name of drilling contractor H. A. Miller Address 725 Artesia, New Mexico

Elevation above sea level at top of casing 3496 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 1000 to No. 4, from to

No. 2, from " to No. 5, from to

No. 3, from " to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 185 to 190 feet 5' - 14 hbl. - 8 hr.

No. 2, from 2342 to 2343 feet 1' - 4 " - 8 hr.

No. 3, from 2369 to 2381 feet 12' - 11 " - 8 hr.

No. 4, from 2401 to 2406 feet 5' - Hole full 1500'

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10 3/4	42	8	Satl.	225	1 1/2 in.				surface water.

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
15 1/4	10 3/4	255	None	Comp	Heavy	25 sax.

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	None					

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from Top feet to 250 feet, and from feet to feet

PRODUCTION

Put to producing 19

The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

J. L. Swan Driller Jim Miller Driller

Carl Jorren Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 21st day of May 19 49

Notary Public

Artesia, New Mexico May 21, 1949

Name H. A. Miller

Position Contractor

Representing Jerry Curtis Company or Operator

Address 725, Artesia, New Mexico

My Commission expires March 6, 1951

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	115	115	Red Shale
115	175	60	" " with anhy. & gyp.
175	185	10	Gyp - 14 bbls. water
185	230	45	Anhy. - gyp shells
230	300	70	" " "
300	320	20	Br. lime
320	330	10	Anhy.
330	365	35	Anhy. & lime.
365	490	125	Anhy.
490	540	50	Anhy. - broken.
540	575	35	Anhy.
575	640	65	" & Red bed breaks.
640	690	50	Anhy.
690	705	15	Br. lime.
705	765	60	Anhy.
765	789	24	Br. lime
789	795	6	Anhy.
795	905	290	"
905	910	5	Sandy anhy. - oil stained.
910	925	15	" "
925	995	70	Anhy.
995	1020	25	" & red sandy conglomerite.
1020	1280	260	Anhy.
1280	1290	10	Red Sand (Top R.S. by geologist @ 1280)
1290	1303	13	Anhy.
1303	1315	12	Red Sand
1315	1415	100	Anhy. (Reduced hole 12 1/2 to 8 1/4 - 1336)
1415	1440	25	Sandy Gr. lime.
1440	1485	45 45	Anhy.
1485	1495	10	Hard Gr. lime.
1495	1515	20	Brown lime.
1515	1523	8	" " sandy.
1523	1571	48	Gr. lime.
1571	1587	16	Anhy.
1587	1708	121	Gr. lime.
1708	1720	12	" " sandy.
1720	1857	137	Lime
1857	1863	9	Lime, pink.
1863	2369	496	Gr. lime (Top S.A. by geologist @ 2005' Water - 4 bbl. 8 hr. 2342-47').
2369	2381	12	Lime sandy - water increase 11 bbl.
2381	2401	20	Gr. lime
2401	2414	13	" " sandy. Water increase 24 bbl.
2414	2450	36	Gr. lime - 1500 ' water.
	TD.		

*Corrected Steel Line
Halliburton T.D. 2455
SMM.*