


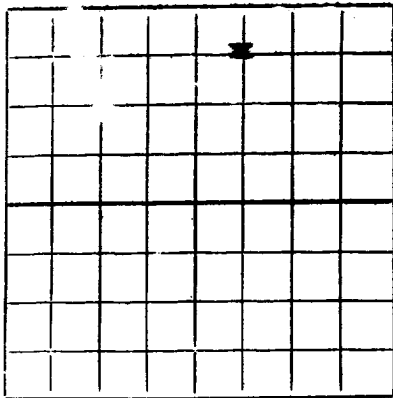

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

RECEIVED

WELL RECORD AUG 11 1960

O. C. C.

Mail to District Office, Oil Conservation Commission, to which Form C-106 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

Western Development Company of Delaware

State E-4202

(Company or Operator)

(Lease)

Well No. 1, in NW 1/4 of NE 1/4, of Sec. 25, T. 19-S, R. 27-E, NMPM.

Wildcat

Pool,

Eddy

County.

Well is 660 feet from N line and 1980 feet from E line

of Section 25. If State Land the Oil and Gas Lease No. is E-4202

Drilling Commenced June 28, 1960. Drilling was Completed August 8, 1960.

Name of Drilling Contractor Yates Drilling Company

Address Artesia, New Mexico

Elevation above sea level at Top of Tubing Head 3480'. The information given is to be kept confidential until

Not Confidential, 19

OIL SANDS OR ZONES

No. 1, from None to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 494 to 496 feet. 1 Bbl. per hour

No. 2, from 1486 to 1490 feet. 27 Gal. per hour

No. 3, from 2236 to 2253 feet. 12 Gal. per hour

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
10-3/4"		Used	428'		428'	None	Surface casing pulled upon P&A

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12"		0 - 25'	15			Mud spotted
10"		440'-540'	41			between plugs.
10"		1425-1525	41			
8"		2160-2260	41			
8"		2625-2650	15			

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

None - Well P&A. P&A started 8-9-60, Completed 8-10-60.

Result of Production Stimulation

Depth Cleaned Out

CORD OF DRILL-STEM AND SPECIAL TY

If drill-stem or other special tests or deviation surveys were made, submit report on 10-10-1960 and attach to this

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet.
Cable tools were used from Surface feet to 2650' feet, and from feet to feet.

PRODUCTION

Put to Producing. None, 19.

OIL WELL: The production during the first 24 hours was barrels of liquid of which % was
was oil; % was emulsion; % was sediment. A.P.I.
Gravity.

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of
liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in.

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy	T. Devonian	T. Ojo Alamo
T. Salt	T. Silurian	T. Kirtland-Fruitland
B. Salt	T. Montoya	T. Farmington
T. Yates. 552'	T. Simpson	T. Pictured Cliffs
T. 7 Rivers. 902'	T. McKee	T. Menefee
T. Queen. 1470'	T. Ellenburger	T. Point Lookout
T. Grayburg. 1820'	T. Gr. Wash	T. Mancos
T. San Andres. 2290'	T. Granite	T. Dakota
T. Glorieta	T.	T. Morrison
T. Drinkard	T.	T. Penn
T. Tubbs	T.	T.
T. Abo	T.	T.
T. Penn	T.	T.
T. Miss	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	200	200	Lime and Sand	1910	1950	40	Dolo & gray sand
200	550	350	Anhydrite and Dolomite	1950	1980	30	Dolo
550	600	50	Sand, Dolomite & Anhyd	1980	2010	30	Dolo & gray sand
600	640	40	Anhy, and Red Shale	2010	2020	10	Gray sand
640	660	20	Red sand & anhy	2020	2040	20	Dolo
660	700	40	Anhy & red shale	2040	2050	10	Gray sand
700	750	50	Dolo, anhy & red shale	2050	2080	30	Dolo
750	820	70	Dolo, anhy & red shale	2080	2100	20	Dolo & gray sand
820	880	60	Anhy & red sand	2100	2110	10	Gray sand
880	900	20	Dolo, anhy & red sand	2110	2130	20	Gray sand & dolo
900	1000	100	Dolo, anhy, red & gray sd	2130	2170	40	Dolo
1000	1100	100	Dolo, 1/2 pink, & anhy	2170	2210	40	Dolo & gray sand
1100	1320	220	Dolo, 1/2 pink, anhy&red sd.	2210	2230	20	Gray sand
1320	1400	80	Dolo, 20%pink, anhy&red sh.	2230	2240	10	Dolo & gray sand
1400	1490	90	Dolo, anhy, red&gray sd.	2240	2250	10	Gray sand
1490	1510	20	Red & gray sand	2250	2270	20	Dolo & gray sand
1510	1670	160	Dolo, red & gray sand	2270	2350	80	Dolo, 20% pink
1670	1680	10	Red & gray sand	2350	2370	20	Dolo, 5% pink & gray sand
1680	1720	40	Red & gray sd, dolo&anhy	2370	2540	170	Dolo, 10% pink
1720	1800	80	Dolo, 10%pink, gray sand	2540	2560	20	Dolo, 20%pink & gray sand
1800	1910	110	Dolo	2560	2654	94	Dolo
				TOTAL			2654'

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

August 11, 1960 (Date)

Company or Operator. Western Development Co. of Del. Address. P. O. Box 427, Artesia, New Mexico

Name. Richard W. Warren Position or Title. Engineer