

## NEW MEXICO OIL CONSERVATION COMMISSION

SANTA FE, NEW MEXICO

**MISCELLANEOUS NOTICES**

Submit this notice in triplicate to the Oil Conservation Commission or its proper agent before the work specified is to begin. A copy will be returned to the sender on which will be given the approval, with any modifications considered advisable, or the rejection by the Commission or agent, of the plan submitted. The plan as approved should be followed, and work should not begin until approval is obtained. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of notice by checking below:

NOTICE OF INTENTION TO TEST CASING SHUT-OFF		NOTICE OF INTENTION TO SHOOT OR CHEMICALLY TREAT WELL	
NOTICE OF INTENTION TO CHANGE PLANS		NOTICE OF INTENTION TO PULL OR OTHERWISE ALTER CASING	
NOTICE OF INTENTION TO REPAIR WELL	X	NOTICE OF INTENTION TO PLUG WELL	
NOTICE OF INTENTION TO DEEPEN WELL		Artesia, New Mexico	October 11, 1950

Place

Date

OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico.

Gentlemen:

Stanley L. Jones Continental Delaware 1 NE NW/4  
Following is a notice of intention to do certain work as described below at the  
8 19 29 Wildcat Well No. in  
Company or Operator Lease  
of Sec. Eddy, T., R., N. M. P. M., Field.  
County.

**FULL DETAILS OF PROPOSED PLAN OF WORK**

~~FOLLOW INSTRUCTIONS IN THE RULES AND REGULATIONS OF THE COMMISSION~~  
We plan to drill to the depth of 5,000' or oil and gas in commercial quantities at a lesser depth, or sulphur or salt water in such quantities to make drilling operations impractical.

We will run production string in accordance to depth and demand necessary to shut off all water.

This well was formerly known as the Continental Oil Company State "8", Well No. 1. We have purchased this well from them.  
located in the NW/4 of Sec. 8, 19, 29

Approved

except as follows:

OCT 12 1950

19

Stanley L. Jones

Company or Operator

By

Owner

Position

Send communications regarding well to  
Stanley L. Jones

Name

Box 464

Address

Artesia, New Mexico

OIL CONSERVATION COMMISSION,

By

Title

OIL AND GAS INSPECTOR




RECEIVED  
JUN 20 1949

RECEIVED  
JUN 17 1949  
HOBBS OFFICE

FORM C-105

Oil Cons. Comm.

NEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

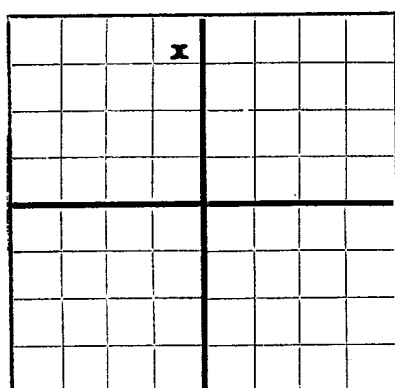

AREA 640 ACRES  
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Continental Oil Company  
Company or Operator  
State "NM" Well No. 1 in NW/4 of Sec. 8 T. 19-S  
R. 29-E, N. M. P. M., Wildcat Field, Eddy County.  
Well is 330 feet south of the North line and 2970 feet west of the East line of Section 8-19-29  
If State land the oil and gas lease is No. Assignment No.  
If patented land the owner is. Address.  
If Government land the permittee is. Address.  
The Lessee is Continental Oil Company Address Ponca City, Oklahoma  
Drilling commenced April 6, 1949 Drilling was completed May 27, 1949  
Name of drilling contractor Kincaid & Watson Drilling Co. Address Fort Worth, Texas  
Elevation above sea level at top of casing 3390' feet.  
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from to No. 4, from to  
No. 2, from to No. 5, from to  
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.  
No. 2, from to feet.  
No. 3, from to feet.  
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
13-3/8	48#		H-40	307'0"	T.P.		FROM	TO	

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
15-1/2	13-3/8	305'	250	HOWC Co.		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set  
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet  
Cable tools were used from 0 feet to 3045' feet, and from feet to feet

PRODUCTION

Put to producing 19.  
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.  
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas.  
Rock pressure, lbs. per sq. in.

EMPLOYEES

G. W. Hill Driller Earl Howell Driller  
H Joe G. Taylor Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 16th day of June 1949  
Notary Public  
My Commission expires 5-17-49  
Hobbs, New Mexico 6-16-49 Date  
Name  
Position District Superintendent  
Representing Continental Oil Company  
Address Box CC, Hobbs, New Mexico

# FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	10	10	Sand
10	20	10	Caliche
20	50	30	Sand
50	60	10	Sand
60	65	5	Red rock
65	95	30	Red shale
95	114	19	Red bed
114	120	6	Sandy shale
120	130	10	Sand
130	190	60	Sand and gravel
190	210	20	Sand
210	215	5	Red sand
215	225	10	Sand and gravel
225	267	42	Red rock
267	290	23	Anhydrite
290	305	15	Red rock
305	375	70	Anhydrite
375	415	40	Red rock and anhydrite
415	420	5	Anhydrite and potash
420	435	15	Red rock
435	445	10	Anhydrite
445	470	25	Anhydrite, red rock, gyp and salt
470	480	10	Potash and salt
480	575	95	Salt
575	605	30	Anhydrite
605	770	165	Salt
770	845	75	Anhydrite and red rock
845	875	30	Anhydrite and blue shale
875	930	55	Anhydrite
930	935	5	Brown lime
935	945	10	Anhydrite and gray lime
945	1020	75	Anhydrite
1020	1075	55	Anhydrite and sandy blue shale
1075	1140	65	Anhydrite
1140	1150	10	Anhydrite and red rock
1150	1205	55	Anhydrite
1205	1230	25	Anhydrite and red rock
1230	1275	45	Anhydrite and shale
1275	1285	10	Anhydrite
1285	1300	15	Gray lime
1300	1310	10	Anhydrite and gray lime
1310	1325	15	Gray lime
1325	1385	60	Gray lime
1385	1395	10	Anhydrite, lime and sand
1395	1405	10	Lime
1405	1474	69	Anhydrite
1474	1495	21	Anhydrite and gray lime
1495	1568	73	Lime
1568	1576	8	Anhydrite, lime and sand
1576	1905	329	Lime
1905	1923	18	Brown sand
1923	2226	303	Lime
2226	2260	34	Sand
2260	2567	307	Lime
2567	2590	23	Lime and sand
2590	3045	455	Lime

Well was drilled to total depth of 3045' in lime.  
Well was not shot.  
Well was not acidized.  
Well tested no oil, gas or water. Plugged and abandoned as dry hole.  
Drilling completed 5-25-49.  
Date plugging started 5-26-49.  
Date plugging completed 5-27-49.

Orig/2 - N.M.O.C.C.-Hobbs, N.M.  
cc: HLJ-2 RM District Foreman File  
Stanley L. Jones-Box 464-Artesia, N.M.