


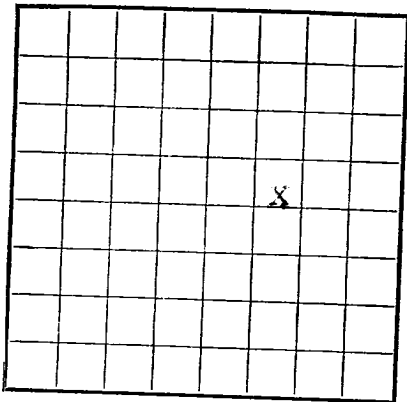

LOCATE WELL CORRECTLY

U. S. LAND OFFICE
SERIAL NUMBER LC 22387 (a)
LEASE OR PERMIT TO PROSPECTUNITED STATES RECEIVED
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY
MAY 30 1960

LOG OF OIL OR GAS WELL

Company PAUL E. HASKINS Address 801 First National Bank Bldg.
Lessor or Tract Hondo Oil & Gas Field N. Shugart State New Mexico
Well No. 2 Sec. 18 T. 31E Meridian NMPM County Eddy
Location 2310 ft. N. of N. Line and 165 ft. E. of E. Line of Sec. 9 Elevation 3707
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed PAUL E. HASKINS *Paul E. Haskins*Date 5/24/60Title Owner

The summary on this page is for the condition of the well at above date.

Commenced drilling December 25, 19 59 Finished drilling May 1, 19 60

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 3888 to 3900 No. 4, from _____ to _____
No. 2, from 3912 to 3952 No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>8 5/8</u>	<u>28</u>	<u>11 1/2</u>	<u>840</u>	<u>840</u>	<u>Texas</u>	<u>None</u>	<u>None</u>	<u>None</u>	<u>Shut-off wtr.</u>
<u>4 1/2</u>	<u>5</u>	<u>11 1/2</u>	<u>3906</u>	<u>3906</u>	<u>Baker</u>	<u>3893</u>	<u>3897</u>	<u>3893</u>	<u>Production</u>
							<u>3923</u>	<u>3959</u>	<u>Production</u>

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>8 5/8</u>	<u>840</u>	<u>50 sx.</u>	<u>Pump trks</u>		
<u>4 1/2</u>	<u>3906</u>	<u>110 sx.</u>	<u>Pump trks</u>		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to 3906 feet, and from _____ feet to _____ feet

DATES

5/24/, 19 60 Put to producing 5/15/, 19 60

The production for the first 24 hours was 84 barrels of fluid of which 25% was oil; 75% emulsion; Na% water; and Na% sediment. Gravity, °Bé. _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

R. High, Driller Harvey Simpson, Driller
M. E. Willis, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
	<u>560</u>	<u>560</u>	<u>Red Beds</u>
<u>560</u>	<u>825</u>	<u>265</u>	<u>Anhydrite</u>
<u>825</u>	<u>1855</u>	<u>1030</u>	<u>Salt</u>
<u>1855</u>	<u>2030</u>	<u>125</u>	<u>Anhydrite</u>
<u>2030</u>	<u>2430</u>	<u>400</u>	<u>Anhydrite, Shale & sand</u>
<u>2430</u>	<u>3225</u>	<u>795</u>	<u>Lime & Anhydrite</u>
<u>3225</u>	<u>3400</u>	<u>175</u>	<u>Sand & Lime</u>
<u>3400</u>	<u>3890</u>	<u>490</u>	<u>Lime & Anhydrite</u>
<u>3890</u>	<u>3900</u>	<u>10</u>	<u>Sand</u>
<u>3900</u>	<u>3920</u>	<u>20</u>	<u>Lime</u>
<u>3920</u>	<u>3960</u>	<u>40</u>	<u>Sand</u>
<u>3960</u>	<u>3996 TD</u>	<u>36</u>	<u>Lime</u>

