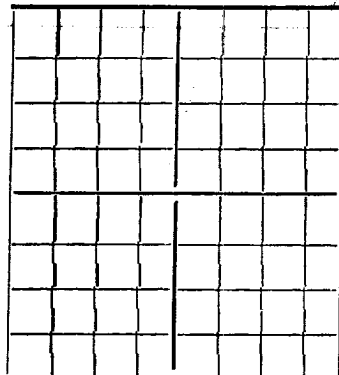


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE

Me-Tex Supply Company Hobbs, New Mexico
Company or Operator Address
State 16 Well No. 1 in NW NW of Sec. 16, T. 18
Lease
R. 31, N. M. P. M., Shugart-Paton Field, Eddy County.
Well is 660' feet south of the North line and 4290 feet west of the East line of Section 16
(990' FWL)
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is, Address
If Government land the permittee is, Address
The Lessee is, Address
Drilling commenced September 6 1939 Drilling was completed October 23 1939
Name of drilling contractor Midland Drig. Co., Address Dallas, Texas
Elevation above sea level at top of casing 3667 feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3196 to 3221 No. 4, from to
No. 2, from 3525 to 3535 No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 700 to 710 feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO		PURPOSE
8 5/8	32	8	S H	880	Plain				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8 5/8	830	50	Halliburton		50 Sacks

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		None				

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 0 feet to 3635 feet, and from feet to feet

PRODUCTION

Put to producing 10, 19
The production of the first 24 hours was 20 barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Ted Hebron, Driller Bill Prior, Driller
H. A. Burdette, Driller John Jenkins, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 15 day of November, 1939
SEAL Don Hudgens Notary Public.
My Commission expires October 15, 1941
Name B. W. Jarboe
Position Prod. Supt.
Representing Me-Tex Supply Co.
Company or Operator
Address Box 1577, Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
5	35		Caliche
35	80		Red Sand
80	580		Red rock
580	602		Anhy
602	617		Red Rock
617	670		Anhy
670	700		Gyp
700	710		Water sand
710	715		Anhy
715	765		Red rock
765	870		Salt
870	915		Anhy
915	930		Salt and potash
930	940		Anhy and salt
940	1630		Salt, potash, anhy
1630	1645		Anhy
1645	1800		Salt, potash, anhy
1800	1955		Anhy
1955	1965		Lime
1965	2110		Anhy
2110	2130		Red rock
2130	2455		Anhy
2455	2465		Bentonite shale
2465	2530		Anhy
2530	2555		Lime
2555	2565		Anhy
2565	2587		Lime
2587	2800		Anhy
2800	2925		Lime
2925	2943		Anhy
2943	3152		Lime
3152			Total depth