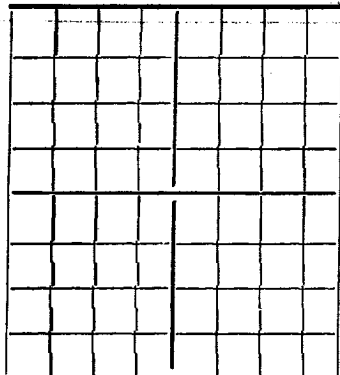


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE

Addison Oil Company 312 Kennedy Bldg, Tulsa, Oklahoma
Company or Operator Address
Ginsberg Well No. 1 in NE NE of Sec. 17, T. 18
Lease
R. 31, N. M. P. M., Shugart Field, Eddy County.
Well is 660 feet south of the North line and 660 feet west of the East line of section 17
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is, Address
If Government land the permittee is, Address
The Lessee is, Address
Drilling commenced September 15 1939 Drilling was completed October 17 19 39.
Name of drilling contractor, Address
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 3154 to 3187 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
8 5/8	24	8	L.W.	804'				Surface pipe
7	20	8	S.S.	3025'				Oil string

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
8 5/8	8 5/8	804	50	Halliburton		
7	7	3025'	100	Halliburton	Heavy mud circulated	

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet.
Cable tools were used from 0 feet to 3187 feet, and from feet to feet.

PRODUCTION

Put to producing October 21, 19 39.
The production of the first 24 hours was 157 barrels of fluid of which 100 % was oil; %
emulsion; % water; and % sediment. Gravity, Be 38
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

T. H. Donnelly, Driller Phil Walker, Driller
Dewey Willis, Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

October 23, 19 39

Place Date

Subscribed and sworn to before me this day of, 19
Name Addison Oil Company
Position H. A. Sherman
Vice President
Representing
Company or Operator
Notary Public.

My Commission expires Address

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	10		Surface
10	35		Brown shale
35	90		Red rock and sand
90	265		Sandy shale, red bed
265	535		Red rock, gyp
535	650		Anhy
650	670		Water sand
670	685		Anhy
685	720		Red rock, anhy
720	730		Red bed
730	745		Salt
745	807		Anhy
807	845		Salt
845	860		Anhy
860	1245		Salt, potash
1245	1260		Anhy
1260	1600		Salt
1600	1615		Anhy
1615	1785		Salt
1785	1810		Anhy and lime
1810	1815		Shale blue
1815	2470		Anhy
2470	2565		Lime
2565	2610		Anhy
2610	2865		Lime
2865	2995		Anhy
2995	3025		Lime and anhy
3025	3035		Anhy
3035	3045		Sand
3045	3070		Lime and anhy
3070	3154		Anhy
3154	3187		Oil sand
3187			Total depth