

N.M.O.C.D. COPY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☐ other ☐ Dual WIW
2. NAME OF OPERATOR ARCO Oil & Gas Company /
Division of Atlantic Richfield Company
3. ADDRESS OF OPERATOR
Box 1710, Hobbs, New Mexico 88240
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17
below.) Unit "F"
AT SURFACE: 2310' FNL & 2310' FWL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH: As Above

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE,
REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL resume inf ☒
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON*Yates only ☒
(other) _____

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐

5. LEASE
~~LC 029392 (b)~~ NM-10191
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
East Shugart Unit WF
8. FARM OR LEASE NAME
East Shugart Unit
9. WELL NO.
15
10. FIELD OR WILDCAT NAME
Shugart-Yates 7 R, Queen G.
11. SEC., T., R., M., OR BLK. AND SURVEY OR
AREA
34-18S-31E
12. COUNTY OR PARISH Eddy 13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
3627' GR

(NOTE: Report results of multiple completion or zone
change on Form 9-330.)

RECEIVED

JUL 17 1980

O. C. D.
ARTESIA, OFFICE

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates,
including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and
measured and true vertical depths for all markers and zones pertinent to this work.)*

1. Rig up, install BOP, POH w/dual Comp assy.
2. Set plug in Model "D" pkr @ 2826'. Spot 3 sx sd on top.
3. RIH w/pkr, test for csg leaks.
4. Set cmt retr approx 2580'. Squeeze cmt Yates perf's 2621-2771' w/ C1 C cmt w/2% CaCl. WOC.
5. Drill cmt retr & cmt. Press test csg to 1500# for 30 mins. Rev out sd. Pull pkr plug.
6. RIH w/injection tbq, set in Model "D" pkr @ 2826'.
7. Displace 7"x2-3/8" annulus w/corrosion inhibited fresh wtr. Hook up well head for single WIW. Test pkr & return to single WIW in Queen zone 3315-3811 & 3818-3832'.


Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED John Lee TITLE Dist. Drlg. Supt. DATE 7/11/80

(This space for Federal or State office use)

APPROVED BY (Orig. Filed) EDDIE W. CHILDS TITLE ACTING DISTRICT ENGINEER DATE JUL 16 1980
CONDITIONS OF APPROVAL, IF ANY:

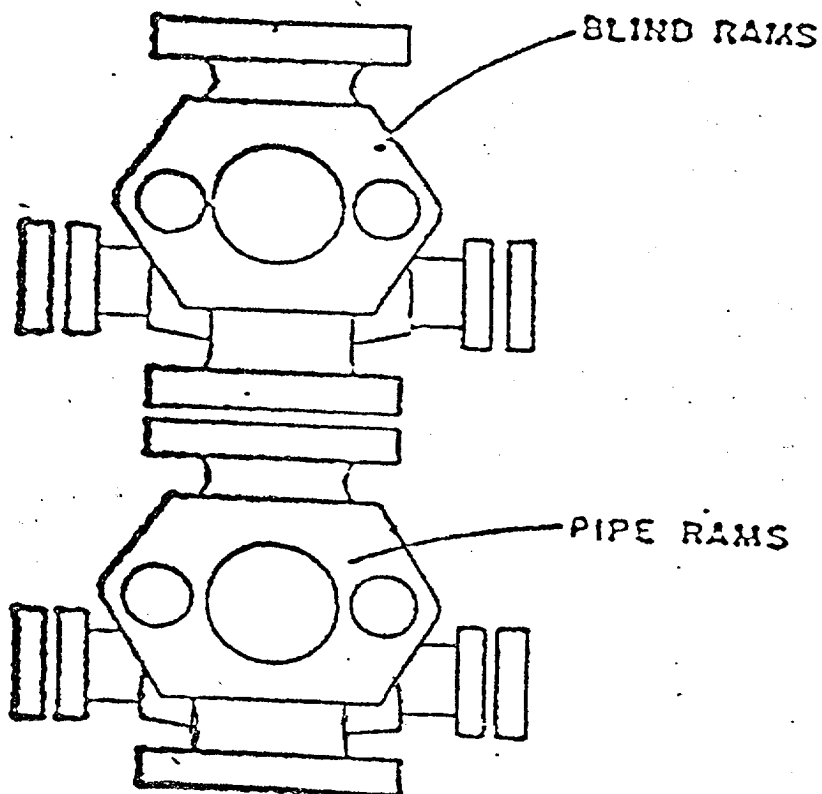

ATLANTIC RICHFIELD COMPANY
Blow Out Preventer Program

Lease Name East Shugart Unit

Well No. 15

Location 2310' FNL & 2310' FWL,

Sec 34-18S-31E, Eddy County, N M

BOP to be tested before installed on well and will be maintained in good working condition during drilling. All wellhead fittings to be of sufficient pressure to operate in a safe manner.