




ROGER HANKS BARBARA FED #4

INTERVAL	FOOTAGE	DEV	DRIFT PER 100 FT.	LATERAL DISP/FT.
0 - 438	438	1°	1.75	7.66
438 - 606	168	2°	3.49	5.86
606 - 692	86	3°	5.23	4.50
692 - 732	40	1 1/4°	2.18	.87
732 - 748	16	1°	1.75	.28
748 - 778	30	3/4°	1.31	.39
778 - 840	62	1 1/4°	2.18	1.35
840 - 870	52	1 3/4° →	3.05	1.59
870 - 892		1 3/4°		
892 - 927	35	2°	3.49	1.22
927 - 987	60	1 3/4°	3.05	1.83
987 - 1133	146	1 1/2°	2.62	3.82
1133 - 1227	94'	1 1/4°	2.18	2.05
1227 - 1352	125	1°	1.75	2.19
1352 - 1909	557	3/4°	1.31	7.30
1909 - 2437	528'	1/4°	.44	2.32
2437 - 3122	685'	1 1/4°	2.18	14.93
3122 - 3402	280'	1 1/2°	2.62	7.34
3402 - 3495	93'	3 3/4°	6.54	6.08
3495 - 3508	13'	3 1/2°	6.11	.79
3508 - 3646	138'	3°	5.23	7.22
3646 - 3720	74'	2 1/4°	3.93	2.91
3720 - 3728	8'	3 3/4°	6.54	.52
3728 - 3775	47'	4°	6.98	3.28
3775 - 3797	22'	5°	8.72	1.92
3797 - 3828	31'	4 1/2°	7.85	2.43
3828 - 3855	27'	4°	6.98	1.88
3855 - 3918	63'	4 1/4°	7.41	4.67
3918 - 3990	72'	3°	5.23	3.77
3990 - 4067	77'	4 1/2°	7.85	6.04
4067 - 4160	93'	4 3/4°	8.28	7.70
4160 - 4440	280'	5°	8.72	24.42
4440 - 4596	156'	5 1/2°	9.59	14.96
TOTAL LATERAL DISP —				154.04

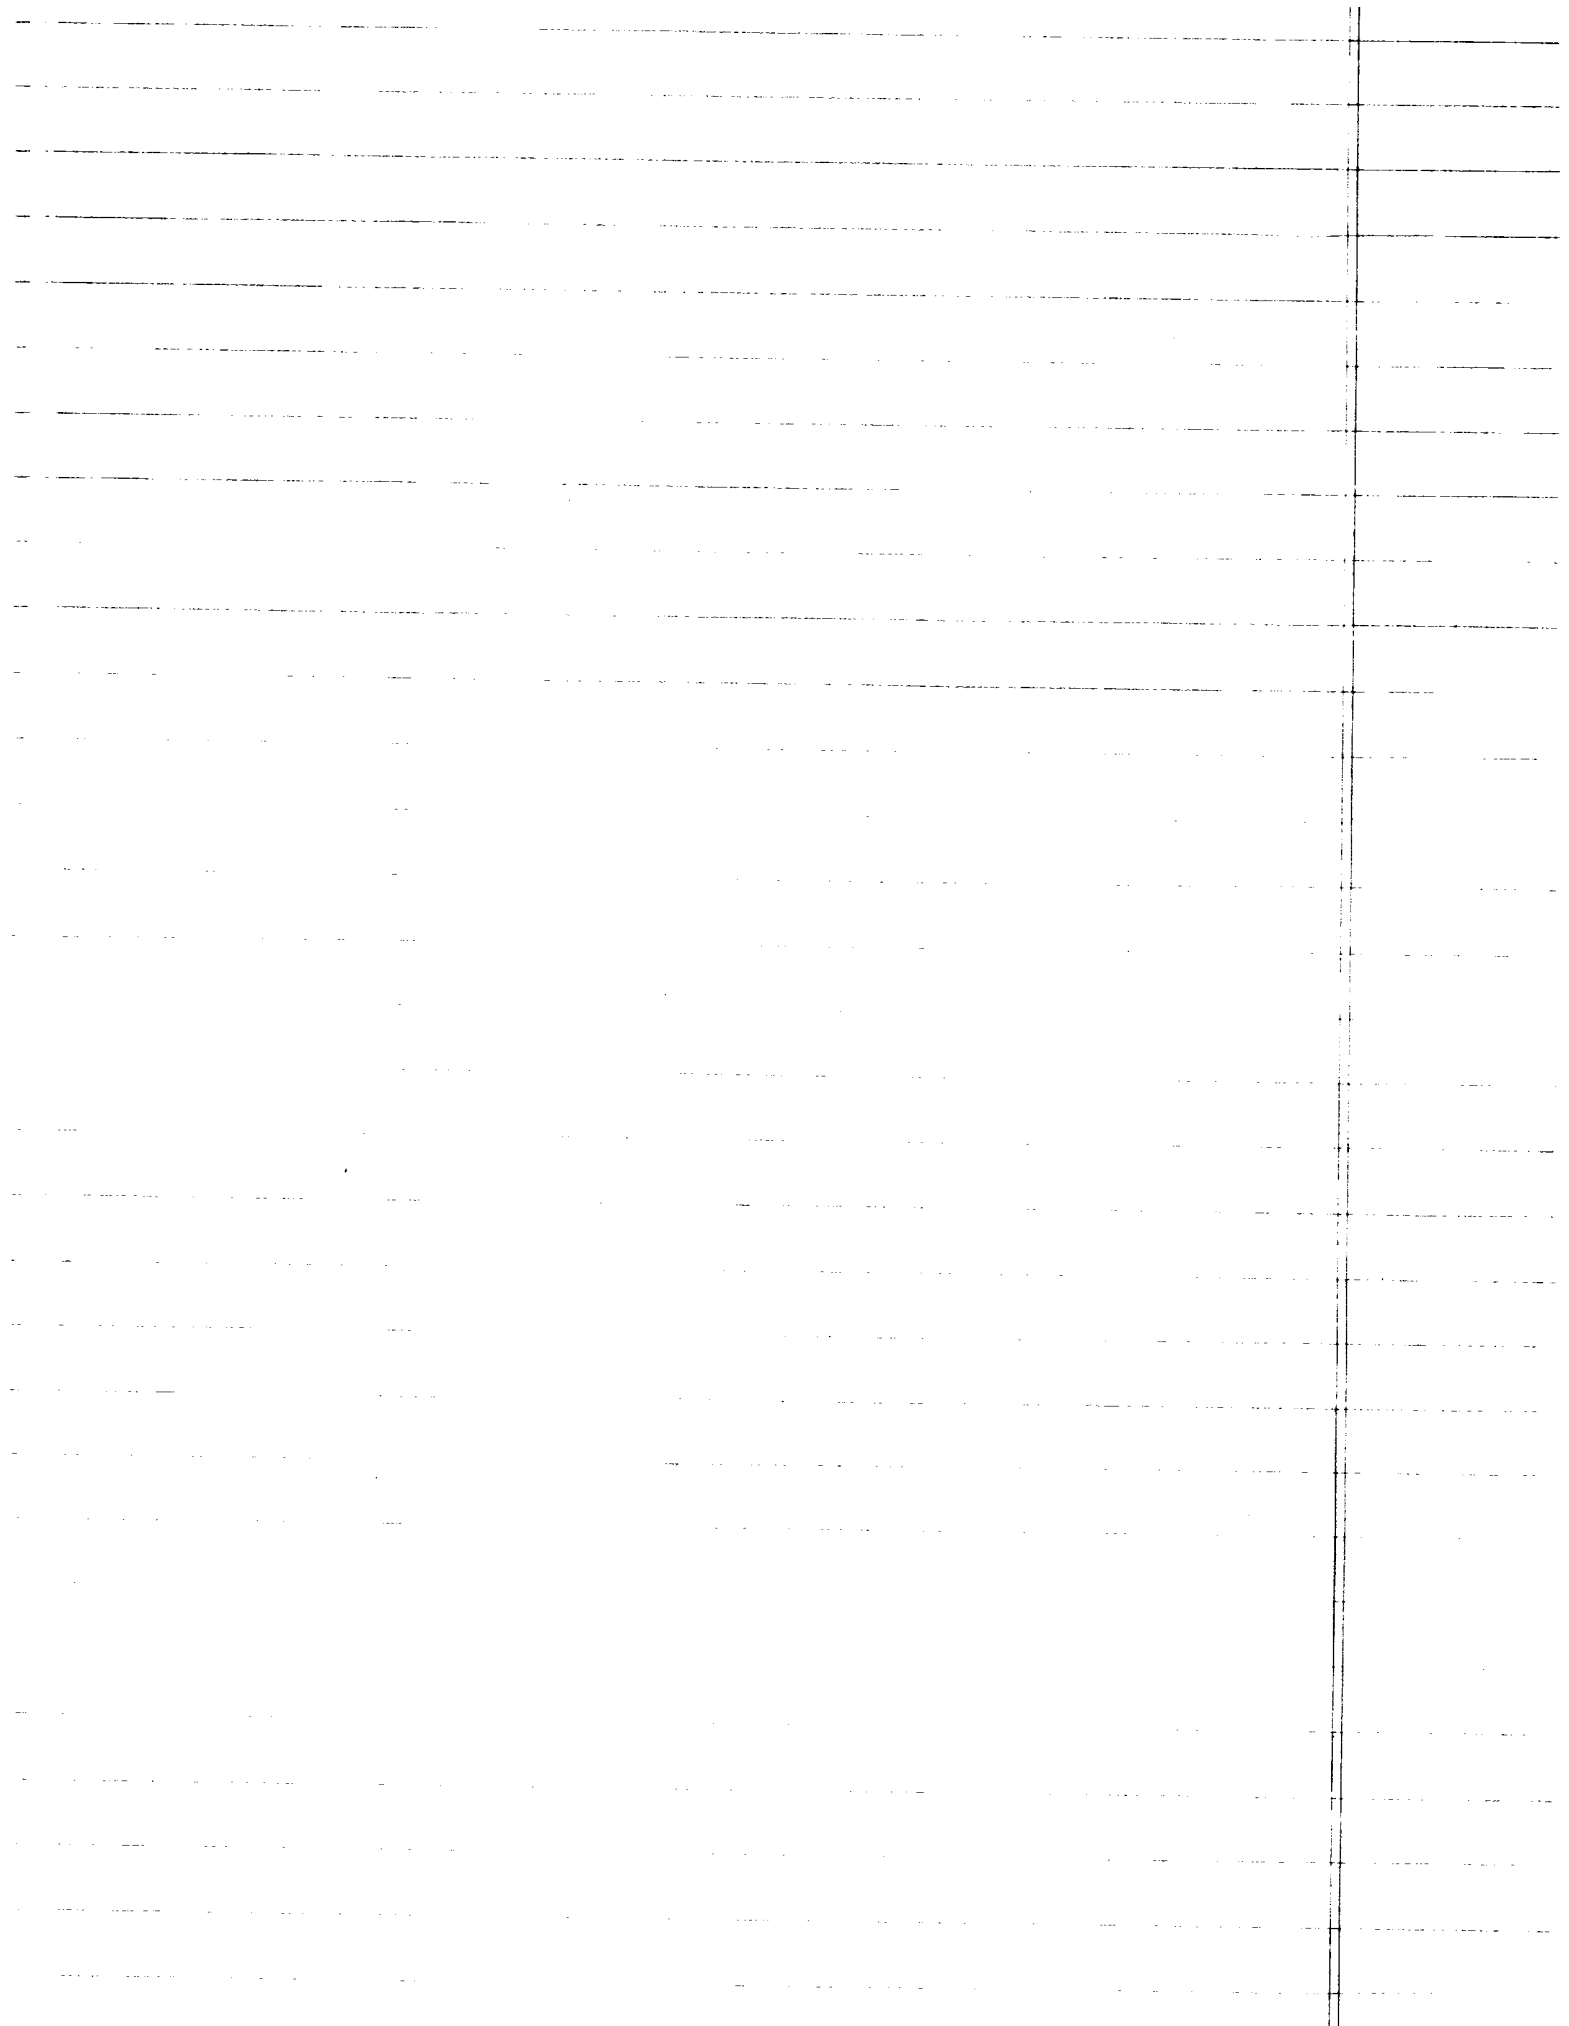