



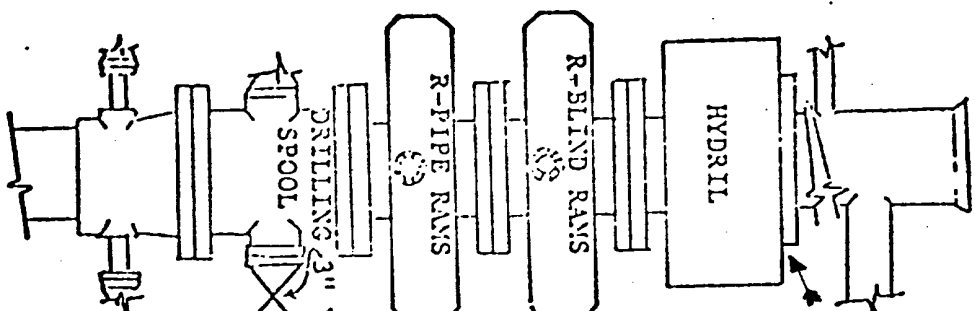

Drilling Head installed here
after setting 8 5/8" casing

BLOW OUT PREVENTION EQUIPMENT
10" 900s ALL FLANGED CONNECTIONS
3,000# WORKING PRESSURE - 6,000# TEST

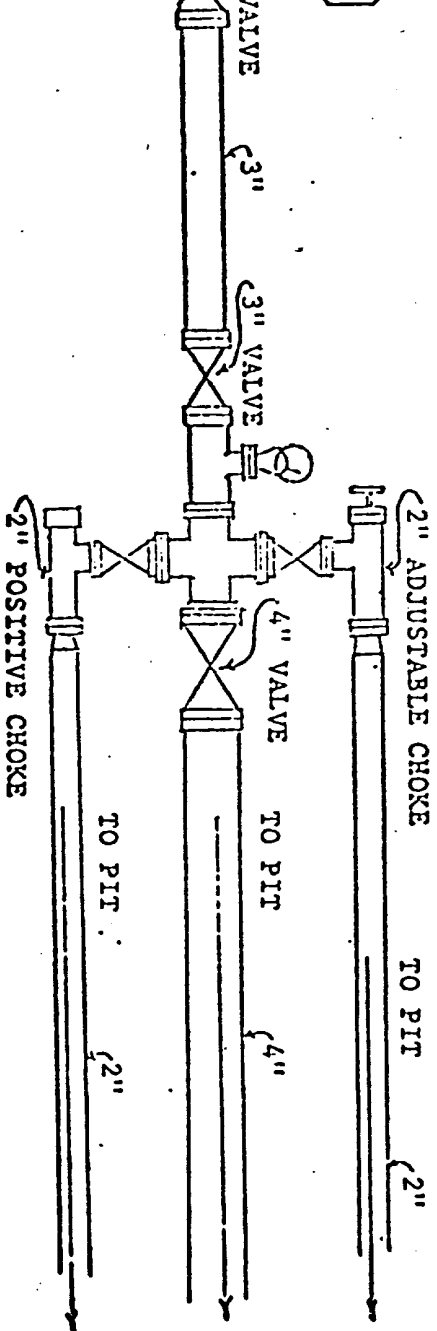

ATTACHMENT TO FORM C-101

Sketch of BOP
Southland Royalty Company
State "23A" Com. No. 1
1980' FSL & 660' FWL
Sec. 23, T-19-S, R-29-E
Eddy County, New Mexico
Contractor: Hondo Drilg. Co. Rig #5
Attachment to Form C-1-1

30-015-22814

Grid- 11318

Property- 2755

Pool- 60660

SHL
DHL 15-195-292
23-195-292
200 SL - 200 EL
R111-P R 9316
R-111A Exhibit B pg.
Signed 1987

3000 85
R111-A Signature date

Surf. 300'
Int. 3000' (except)
R111P - 100' below salt

100' B.S.
Cmt. Prod TO Surf.?
Run salt string deeper

Dev. > 4000'
in sec 15
918-491-4164

7-18-79
Dural Laterlog
300-3001
Densilog Neut
3001-11,778
Acoustilog
Surf-2995

NC TOPS PER LLB

Penn - 9828
Straun - 10337
Abka - 10637
Mor ls. - 11166
Mor cl. - 11245