

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ gas ☐ other ☐
well well
2. NAME OF OPERATOR
Yates Petroleum Corporation ✓
3. ADDRESS OF OPERATOR
207 South 4th, Artesia, NM 88210
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.) 430' FSL & 1650' FEL
AT SURFACE:
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

☒
☐
☐
☐
☐
☐
☐
☐
☐
☐

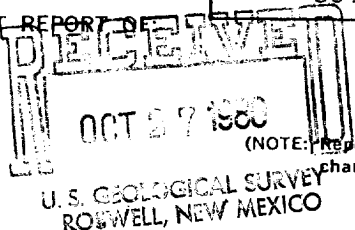

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

5. LEASE
NM0439491
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Federal CW-B
9. WELL NO.
6
10. FIELD OR WILDCAT NAME
Penasco Draw-SA-Yeso Associated
11. SEC., T., R., M., OR BLK. AND SURVEY OR
Unit 0, Sec. 1-19S-24E
12. COUNTY OR PARISH
Eddy
13. STATE
NM
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
3648.8' GR

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded a 15" hole at 3:00 PM 10-20-80.

TD 449' Ran 11 joints of 10-3/4" 40.50# J-55 ST&C casing set at 440'. Notched guide shoe at 440'. Flapper insert float at 409'. Cemented w/350 sacks Class "C" 4% CaCl. PD 12:00 Noon on 10-21-80. Cement circulated 25 sacks to surface. Cement fell back. Filled hole w/3 yards of Ready-Mix. WOC 12 hours. Backed off and reduced hole to 9-1/2". Drilled plug and tested to 600#, OK.

TD 906' Ran 28 joints of 7" 20# J-55 ST&C casing set at 906'. Texas Pattern guide shoe at 906'. Insert float at 873'. Cemented w/200 sacks Class "C", 400 sacks 65-35 Poz, 4% gel, 1/4# celloflakes, 5# gilsonite and 3% CaCl. Tailed in w/150 sacks Class "C" 2% CaCl. PD 2:35 PM 10-22-80. Circulated 150 sacks. Cement fell back. Filled hole w/3 yards of Ready-Mix. WOC 18 hours. Nipped up and tested to 1500#, OK. Reduced hole to 6-1/4". Drilled plug and tested to 600#, OK. Resumed drilling.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Albert R. Hall TITLE Engineer DATE 10-23-80

APPROVED BY P. Chester TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD

OCT 30 1980

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

*See Instructions on Reverse Side