

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPL
(Other instructions re-
verse side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM 17797

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Pecos River Federal 21-A COM

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Undesignated (Morrow)

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 21, T-19-S, R-27-E

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3429.9 GR

12. COUNTY OR PARISH

Eddy

13. STATE

NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

REPAIRING WELL

FRACTURE TREATMENT

ALTERING CASING

SHOOTING OR ACIDIZING


ABANDONMENT*

(Other) Set 11 3/4" Surface Csg

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.) *

Spudded 17 1/2" hole @ 11:15 a.m. 5-23-81. Drl to 230'. CCM to run csg. Ran 6 jts 11 3/4", 42#, H-40, ST&C csg. Set @ 230'. Cmt w/350 sxs Cl "C" w/2% CaCl₂. PD @ 1:00 a.m. 5-24-81. Circ. 55 sxs cmt. WOC 18hr. Install BOP. Test BOP @ 11 3/4" csg to 1000# for 30 min. Held Okay. Drl ahead w/11" bit.

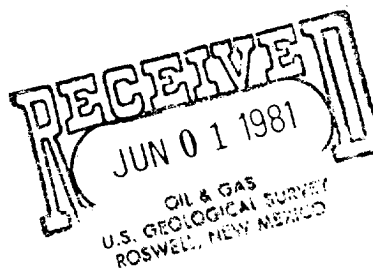

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE District Operation Engineer DATE 5-28-81

(This space for Federal or State official use)

APPROVED BY
CONDITIONS OF

ACCEPTED FOR RECORD

PETER W. CHESTER

APPROVAL, IF ANY:

JUN 1 1981

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

See Instructions on Reverse Side