

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE*
(Other instructions on reverse side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM-19441

6. IF INDIAN, ALLOTMENT NAME

RECEIVED

MAR 1 2 1982

7. UNIT AGREEMENT NAME

O.C.D.

8. FARM OR LEASE NAME

ARTESIA, OFFICE

Gulf Federal

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Wildcat Wind-Rid Hills Yates

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec 31-T19S-R30E

12. COUNTY OR PARISH

Eddy

13. STATE

NM

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐
2. NAME OF OPERATOR
MORRIS R. ANTWEIL /
3. ADDRESS OF OPERATOR
P. O. Box 2010, Hobbs, New Mexico 88240
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface
- 1980' FNL & 1980' FWL of Section 31

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3323.1' GR

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other) Cement Casing

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

REPAIRING WELL

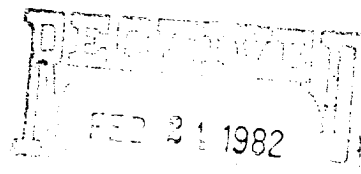
ALTERING CASING

ABANDONMENT*

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Drilled 6-3/4" hole to 1660' TD. Reached TD @ 10:30 AM 20 Feb 82. Ran 42 jts. 4-1/2" 10.5# J-55 casing & cemented @ 1660' with 250 sx Halliburton Light cement containing 30.5#/sk salt & 1/4#/sk flocele & 75 sx 50-50 Poz Mix/Class "C" cement containing 4.8#/sk salt. Plug down @ 7:30 AM 21 Feb 82. Circulated 20 sx cement.

Will test casing when completion operations begin.

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE

Agent

DATE 22 Feb 82

(This space for Federal or State office use)

APPROVED BY ACCEPTED FOR RECORD
CONDITIONS OF APPROVAL

TITLE

DATE

FEB 26 1982

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

*See Instructions on Reverse Side