

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

Oil Cons.  
N.M. Div-Dist. 2  
1301 W. Grand Avenue  
Artesia, NM 88210

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

Case Serial No.  
0029388-D

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Brothers Production Company, Inc.

3a. Address

P.O. Box 7515, Midland, TX 79708

3b. Phone No. (include area code)

(915) 682-2516

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

510' FSL, 2030' FWL, Sec 11, T-18-S, R-31-E

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No. Tamano BSSC Unit  
#508 (Formerly Johnson "B"  
Federal #8)

9. API Well No.  
30-015-25982

10. Field and Pool, or Exploratory Area  
Tamano (Bone Spring)

11. County or Parish, State  
Eddy, NM

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

**Proposed Operation:**

Plug and abandon well as per attached P & A procedure approved by  
Alexis Swoboda on 2/5/02.

\* Note: Plan to commence work 2/7/02.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Paul T. Horne

Title Operations Manager

Signature

*Paul T. Horne*

Date 2/6/02

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

(ORIG. SGD.) ALEXIS C. SWOBODA

PETROLEUM ENGINEER

Date

FEB 12 2002

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Ti:  
St:

Accepted for record

It is a crime for any person knowingly and willfully to make to any department or agency of the United States as to any matter within its jurisdiction.

only

FEB 13 2002

RECEIVED

2002 FEB - 8 AM 8:41

BUREAU OF LAND MGMT  
ROSWELL OFFICE

Form 3160-3  
(August 1999)UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 20005. Lease Serial No.  
LC-029388-D

6. If Indian, Allottee or Tribe Name

7. If Unit or C/A Agreement, Name and/or No.

8. Well Name and No. Tamano BSSC Unit #508 (Formerly Johnson "B")  
9. Well No. 30-015-25982

10. Field and Pool, or Exploratory Area

Tamano (Bone Spring)

11. County or Parish, State

Eddy, NM**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Brothers Production Company, Inc.

3a. Address

P.O. Box 7515, Midland, TX 79708

3b. Phone No. (include area code)

(915) 682-2516

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

510' FSL, 2030' FWL, Sec 11, T-18-S, R-31-E**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

**Proposed Operation:**

Plug and abandon well as per attached P & A procedure approved by  
Alexis Swoboda on 2/5/02.

\* Note: Plan to commence work 2/7/02.

14. I hereby certify that the foregoing is true and correct  
Name (Printed/Typed)Paul T. HorneTitle Operations Manager

Signature

Paul T. HorneDate 2/6/02**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by Alexis Swoboda  
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title PETR. ENGR

Date

2/7/02

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**P&A PROCEDURE**

LC-029388-D

**Lease & Well#:** Tamano BSSC Unit #508 API # 30-015-25982

- 1) MIRU Pulling Unit. POOH w/ rods & pump and lay down. RU BOP and test. Release TAC and POOH w/ 2-3/8" tbg.
- 2) RIH w/ 5-1/2" CIBP & set @ 8065'. Cap w/ 50' cmt.
- 3) Circulate hole w/ mud.
- 4) Pull up to 5500' and spot 25 sx cmt plug.
- 5) Pull up to 2754' and spot 25 sx cmt plug.
- 6) Pull up to 850' and spot 25 sx cmt plug.
- 7) Pull up to 50' and circulate cmt to surface.
- 8) Cut off casing head and weld a plate w/ P&A marker.

SEE ATTACHED FOR  
CONDITIONS OF APPROVAL

approved 2/5/02  
Alexis C. Awoboda

cc: CFO

**BUREAU OF LAND MANAGEMENT**  
**Roswell Field Office**  
**2909 West Second Street**  
**Roswell, New Mexico 88201**  
**505-627-0272**

**Permanent Abandonment of Federal Wells**  
**Conditions of Approval**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within ninety (90) days from the approval date of this Notice of Intent to Abandon. **If you are unable to plug the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.**

2. Notification: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 505-627-0272, Eddy County call 505- 234-5972; for wells in Lea County call 505-393-3612.

3. Blowout Preventers: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. Mud Requirement: Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.

5. Cement Requirement: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either class "C", for up to 7,500 feet of depth, mixed at 14.8 lbs./gal. with 6.3 gallons of fresh water per sack or class "H", for deeper than 7,500 feet plugs, mixed at 16.4 lbs./gal. with 4.3 gallons of fresh water per sack.

6. Dry Hole Marker: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement. The following information shall be permanently inscribed on the dry hole marker: Well name and number, the name of the operator, the lease serial number, the surveyed location (the quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer; such as metes and bounds).

7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and five copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration conditions of approval will be developed and furnished to you.

(rev. 8/20/01)

acs -- coa.p&a




FIELD: TAMANO  
 LEASE: TAMANO BSSC UNIT  
 COUNTY: Eddy  
 STATE: NEW MEXICO

GL: KB:  
 SPUD DATE: 9-23-88  
 API No:

DATE: 1/10/2001  
 BY: PT Horne  
 WELL: 508

LOCATION: 510' FSL & 2030' FWL SECTION 11 T18S R31E

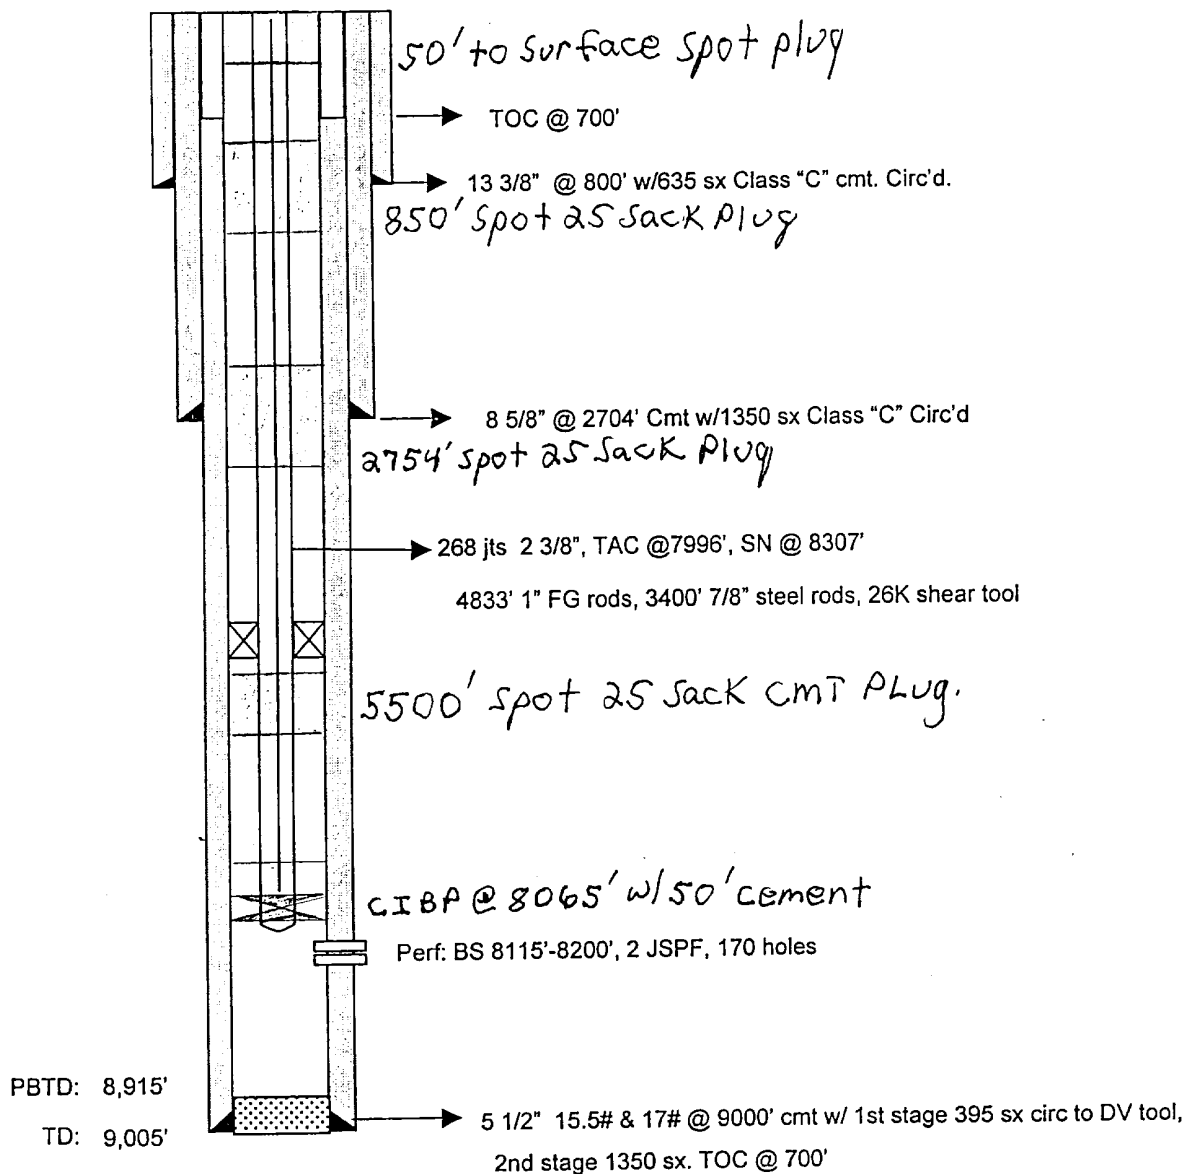

## **P&A PROCEDURE**

Lease & Well#: Tamano BSSC Unit #508      API # 30-015-25982

- 1) MIRU Pulling Unit. POOH w/ rods & pump and lay down. RU BOP and test.  
Release TAC and POOH w/ 2-3/8" tbg .
- 2) RIH w/ 5-1/2" CIBP & set @ 8065'. Cap w/ 50' cmt.
- 3) Circulate hole w/ mud.
- 4) Pull up to 5500' and spot 25 sx cmt plug.
- 5) Pull up to 2754' and spot 25 sx cmt plug.
- 6) Pull up to 850' and spot 25 sx cmt plug.
- 7) Pull up to 50' and circulate cmt to surface.
- 8) Cut off casing head and weld a plate w/ P&A marker.