

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CONTACT RECEIVING
OFFICE FOR NUMBER
OF COPIES REQUIRED
(Other instructions
reverse side)

BLM Roswell District
Modified Form No.
NM060-3160-4

5. LEASE DESIGNATION AND SERIAL NO.

NM 045274

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Hill View AHE Federal Com

9. WELL NO.

5

10. FIELD AND POOL, OR WILDCAT

South Dagger Draw Upper Penn

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Unit A, Sec. 23-T20S-R24E

12. COUNTY OR PARISH 13. STATE

Eddy

NM

1. OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR

YATES PETROLEUM CORPORATION

3. ADDRESS OF OPERATOR

105 South 4th St., Artesia, NM 88210

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface

660' FNL & 660' FEL, Sec. 23-20S-24E

14. PERMIT NO.

30-015-26600

15. ELEVATION (Show whether DF, RT, GR, etc.)

3621' GR

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANE

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.) *

Spudded 26" hole 9:45 AM 3-3-91 with rathole. Set 40' of 20" conductor. Notified BLM Answering Service, Carlsbad, NM of spud. Resumed drilling 14-3/4" hole 11:00 AM 3-6-91. Notified Don Early, BLM, Carlsbad, NM. Ran 28 joints 9-5/8" 36# J-55 casing, set at 1210'. Guide shoe set 1210', insert float set 1166'. Cemented w/900 sx Lite with 10#/sx Gilsonite + 1/2#/sx Flocele + 3% CaCl2 (yield 1.84, wt 12.8). Tail in w/200 sx Class "C" with 2% CaCl2 (yield 1.32, wt 14.8). PD 5:45 AM 3-9-91. Bumped plug to 600 ps, float held OK. Circulated 92 sacks. WOC. Drilled out 11:45 PM 3-9-91. WOC 18 hrs. NU and tested to 1000 psi for 30 minutes. Reduced hole to 8-3/4" and resumed drilling.

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE Production Supervisor

DATE 3-13-91


(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

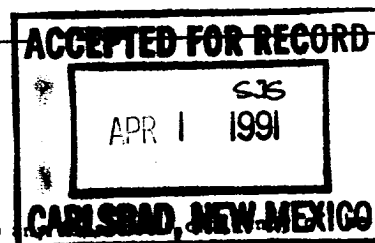

1952-1953

1952-1953