

Operator Shackelford Oil Company
 Well Hudson Fed. #3
 Unit G Section 11 Township 19 Range 31
 API # 30-015-26730


TOPS

Cluster	682'
Salade	900'
Base Salt	2248'
Gates	2443'
7 Rivers	2664'

TOC 242' →
 calc. @ 50%

- * Contact OCD 24 hrs. prior to any work done.
- * Salt gel mud consisting of 10# brine with 25# of gel per barrel must be placed between each plug.
- * Install dry hole marker as per Rule 202.B.2
- * Plugs are to be set from point indicated up.
- * Plugs must not be less than 100' or 25 Sacks of cement, whichever is greater, unless specifically indicated.
- * Shoe and stub plugs will be 50' above and below shoe or stub and tagged.
- * Surface plug will be from 0' - 60'
- * Where plugs are required, cement must be placed inside and outside of all casing string(s) in the correct footage or sacks required, if no cement exists.
- * Plugs to be tagged will be indicated.

8 5/8" @ 666'
 265 SXS
 12 1/4" hole

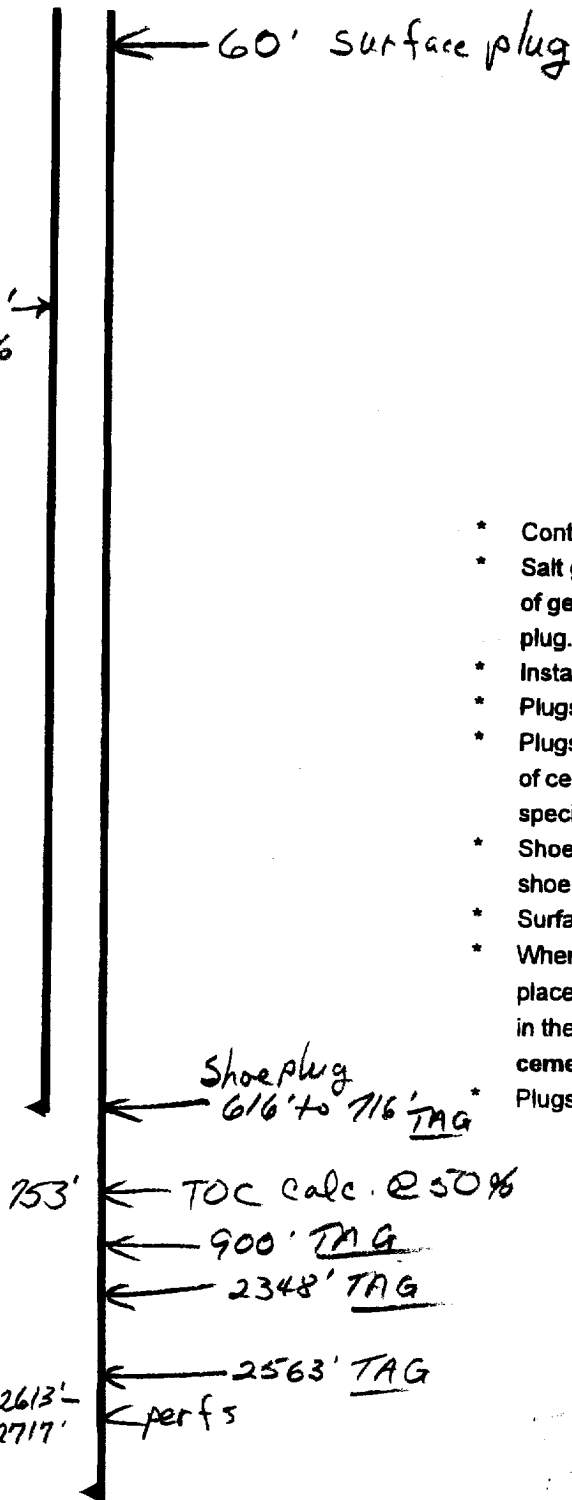

MLB