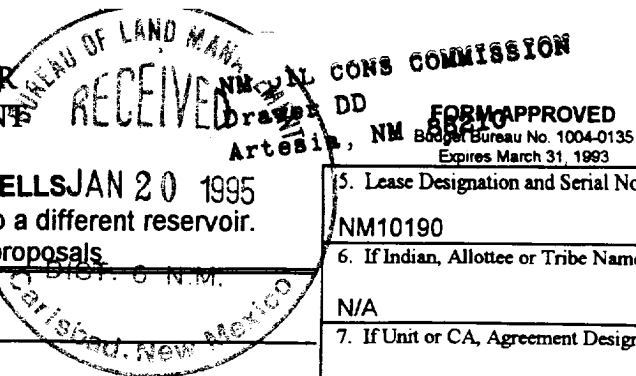


UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

## SUNDRY NOTICES AND REPORTS ON WELLS JAN 20 1995

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.

SUBMIT IN TRIPLICATE

1. Type of Well  
☒ Oil Well ☐ Gas Well ☐ Other2. Name of Operator  
DEVON ENERGY CORPORATION (NEVADA)3. Address and Telephone No.  
20 NORTH BROADWAY, SUITE 1500, OKLAHOMA CITY, OKLAHOMA 73102 (405) 235-36114. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
330' FSL & 280' FWL, Sec. M-35-18S-31E5. Lease Designation and Serial No.  
NM101906. If Indian, Allottee or Tribe Name  
N/A7. If Unit or CA, Agreement Designation  
14-08-001-115728. Well Name and No.  
East Shugart Unit #709. API Well No.  
30-015-2820910. Field and Pool, or Exploratory Area  
Shugart (Y-SR-Q-G)11. County or Parish, State  
Eddy, NM

## CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

## TYPE OF SUBMISSION

## TYPE OF ACTION

- ☐ Notice of Intent  
☒ Subsequent Report  
☐ Final Abandonment Notice

- ☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☒ Other Spud and setting csg strings

- ☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

SPUD 1-2-95 at 1400 hrs. Drilled 12 1/4" hole to 949'. Ran 23jts 8 5/8" 24# J-55 8rd STC surface csg (949.91') w/guide shoe set @ 949' & float collar @ 878.45'.

Dowell cemented 8 5/8" csg as follows: 300 sxs lite w 2% CaCl<sub>2</sub> 1/4 #/sx Celloflake; mixed at 12.7 ppg = 1.93 cf/sx yield; + 200 sxs Class C w/2% CaCl<sub>2</sub>; mixed at 14.8 ppg = 1.32 cf/sx yield; circ'd 90 sx to surface. Job complete @ 2345 hrs 1-3-95.

Drilled 7 7/8" hole. Reached TD 01-08-95 @ 4045'. Western Atlas Wireline ran GR-DLL-MSFL and GR-CNL-ZDN Logs. Ran 94 jts 5 1/2" 15.5# J-55 8rd production casing (4043') w/float shoe set @ 4043', float collar @ 3969.60' and 20 centralizers.

Dowell cemented 5 1/2" csg as follows: preceded by 500 gals mud flush; + 800 sx Lite w/5#/sx salt and 1/4#/sx Celloflakes; mixed @ 12.8 ppg = 1.98 cf/sx yield; + 600 sxs Class C w/3% salt, .4% D-59, .2% D-65 (Dispersant) and 1/4#/sx Celloflakes; mixed at 14.8 ppg = 1.35 cf/sx yield; circ'd 96 sxs cement to surface. Job complete @ 0105 hrs 1-09-95. Waiting on completion.

14. I hereby certify that the foregoing is true and correct

Signed E. L. Buttross, Jr.  
(This space for Federal or State office use)E. L. Buttross, Jr.  
Title District Engineer

Date 1/16/95

Approved by \_\_\_\_\_  
Conditions of approval, if any:

Title \_\_\_\_\_

Date \_\_\_\_\_

SJS

15

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See Instruction on Reverse Side