

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
N.M. Oil & Gas Division
811 S. 1ST ST.
ARTESIA, NM 88210-2834

Form approved.

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK: DRILL ☒ DEEPEN ☐ 3: 9/26/97b. TYPE OF WELL: OIL WELL ☒ GAS WELL ☐ Other ☐ SINGLE ZONE ☐ MULTIPLE ZONE ☐2. NAME OF OPERATOR
DEVON ENERGY CORPORATION (NEVADA) 61373. ADDRESS AND TELEPHONE NO.
20 N. BROADWAY, SUITE 1500, OKC, OK 73102 (405) 235-36114. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)*
At surface 330' FSL & 780' FEL

At top proposed prod. zone (SAME) W.P.

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

15 1/2 miles southeast of Loco Hills, NM

15. DISTANCE FROM PROPOSED LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. 330'
(Also to nearest drile unit line if any)

18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. 200'

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

GL 3619'

SUBJECT TO
LIKE APPROVAL
BY STATE

22. APPROX. DATE WORK WILL START*

November 1, 1997

23. PROPOSED CASING AND CEMENTING PROGRAM

| SIZE OF HOLE | GRADE, SIZE OF CASING | WEIGHT PER FOOT | SETTING DEPTH | QUANTITY OF CEMENT |
|--------------|-----------------------|-----------------|---------------|--|
| 17 1/2" | 14" conductor | | 40" | Ready-Mix to surface circ |
| 12 1/4" | 8 5/8" J-55 | 24# | 950' | 300 sx Lite + 200 sx Class C circ |
| 7 7/8" | 5 1/2" J-55 | 15.5# | 4200' | 550 sx Lite + 500 sx Class C TIE BACK OR CIRC PIC APP. |

We plan to circulate cement to surface on all casing strings.

Devon Energy proposes to drill to 4200'± to test the Queen Sand formation for commercial quantities of oil. If the Queen is deemed noncommercial, the well bore will be plugged and abandoned per Federal regulations. Programs to adhere to onshore oil and gas regulations are outlined in the following exhibits and attachments.

Drilling Program

Surface Use and Operating Plan

Exhibits #1/1-A = Blowout Prevention Equipment

Exhibit #2 = Location and Elevation Plat

Exhibits #3/3-A = Road Map and Topo Map

Exhibit #4 = Wells Within 1 Mile Radius

Exhibits #5 = Production Facilities Plat

Exhibit #6 = Rotary Rig Layout

Exhibit #7 = Casing Design

H₂S Operating Plan

The undersigned accepts all applicable terms, conditions, regulations and restrictions concerning operations conducted on the leased land or portions thereof, as described below.

Lease #: -NM-10193

Legal Description: Section 34-T18S-R31E

Formation: Queen Sand

Bond Coverage: Nationwide

BLM Bond #: CO-1104

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout prevention program, if any.

24.

SIGNED

E. L. Buttross Jr.

TITLE District Engineer

DATE September 23, 1997

*(This space for Federal or State office use)

PERMIT NO. _____ APPROVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY (ORIG. SCD) TONY L. FERGUSON

TITLE

ADM, MINERALS

DATE

10-27-97

See Instructions On Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

State of New Mexico
Energy, Minerals and Natural Resources Department

Sheet 2

Form C-102
Revised February 10, 1994
Instruction on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088

DISTRICT III
1009 Rio Brazos Rd., Aztec, NM 87410

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

| | | |
|-----------------------------------|--|--|
| API Number 30-015-29917 | Pool Code 56439 | Pool Name Shugart (Y-SR-Q-G) |
| Property Code | Property Name EAST SHUGART | Well Number 26-X |
| OGRID No. | Operator Name DEVON ENERGY CORPORATION | Elevation 3619' |

Surface Location

| | | | | | | | | | |
|---------------|-----------|-------------|-------------|---------|---------------|------------------|---------------|----------------|-------------|
| UL or lot No. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
| P | 34 | 18 S | 31 E | | 330 | SOUTH | 780 | EAST | EDDY |

Bottom Hole Location If Different From Surface

| | | | | | | | | | |
|-----------------|-----------------|--------------------|-----------|---------|---------------|------------------|---------------|----------------|--------|
| UL or lot No. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
| | | | | | | | | | |
| Dedicated Acres | Joint or Infill | Consolidation Code | Order No. | | | | | | |

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

| | |
|--|--|
| | OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. <u>E.L. Buttross Jr.</u> Signature E.L. Buttross Printed Name District Engineer Title September 24, 1997 Date |
| | SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my belief. SEPTEMBER 24, 1997 Date Surveyed Signature 7977 Num 7977 Certificate |
| | |
| | |

MINIMUM BLOWOUT PREVENTER REQ

3,000 psi Working Pressure

EXHIBIT 1

3 MWP


STACK REQUIREMENTS

| No | Item | Min I.D | Min Nominal |
|----|---|----------|-------------|
| 1 | Flowline | | |
| 2 | Fill up line | | 2" |
| 3 | Drilling nipple | | |
| 4 | Annular preventer | | |
| 5 | Two single or one dual hydraulically operated rams | | |
| 6a | Drilling spool with 2" min. kill line and 3" min choke line outlets | | |
| 6b | 2" min. kill line and 3" min. choke line outlets in ram. (Alternate to 6a above.) | | |
| 7 | Valve Gate <input type="checkbox"/> Plug <input type="checkbox"/> | 3-1/8" | |
| 8 | Gate valve—power operated | 3-1/8" | |
| 9 | Line to choke manifold | | 3" |
| 10 | Valves Gate <input type="checkbox"/> Plug <input type="checkbox"/> | 2-1/16" | |
| 11 | Check valve | 2-1/16" | |
| 12 | Casing head | | |
| 13 | Valve Gate <input type="checkbox"/> Plug <input type="checkbox"/> | 1-13/16" | |
| 14 | Pressure gauge with needle valve | | |
| 15 | Kill line to rig mud pump manifold | | 2" |

OPTIONAL

| | | | |
|----|---------------|----------|--|
| 16 | Flanged valve | 1-13/16" | |
|----|---------------|----------|--|

CONFIGURATION A

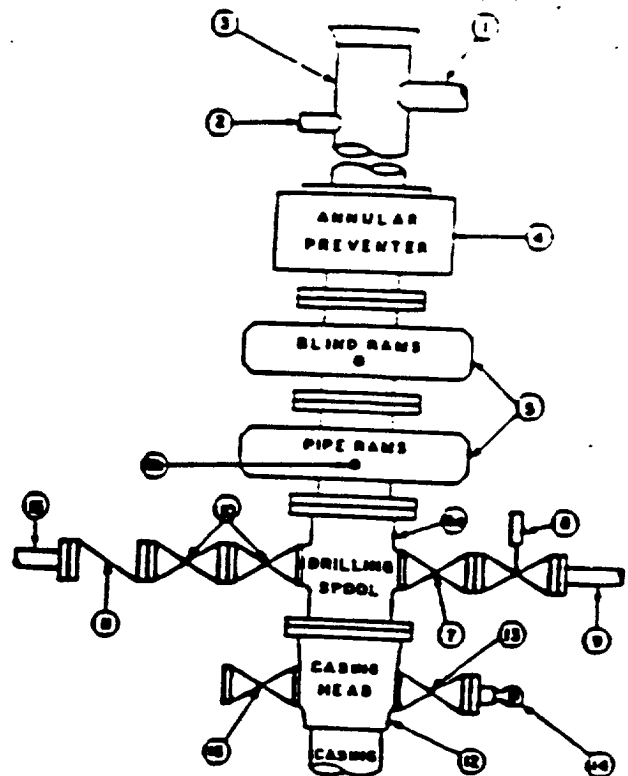

CONTRACTOR'S OPTION TO FURNISH:

1. All equipment and connections above bradenhead or casinghead. Working pressure of preventers to be 3,000 psi, minimum.
2. Automatic accumulator (50 gallon, minimum) capable of closing BOP in 30 seconds or less and, holding them closed against full rated working pressure.
3. BOP controls, to be located near drillers position.
4. Kelly equipped with Kelly cock.
5. Inside blowout preventer or its equivalent on derrick floor at all times with proper threads to fit pipe being used.
6. Kelly saver-sub equipped with rubber casing protector at all times.
7. Plug type blowout preventer tester.
8. Extra set pipe rams to fit drill pipe in use on location at all times.
9. Type RX ring gaskets in place of Type R.

MEC TO FURNISH:

1. Bradenhead or casinghead and side valves.
2. Wear bushing, if required.

GENERAL NOTES:

1. Deviations from this drawing may be made only with the express permission of MEC's Drilling Manager.
2. All connections, valves, fittings, piping, etc., subject to well or pump pressure must be flanged (suitable clamp connections acceptable) and have minimum working pressure equal to rated working pressure of preventers up through choke. Valves must be full opening and suitable for high pressure mud service.
3. Controls to be of standard design and each marked, showing opening and closing position.
4. Choke will be positioned so as not to hamper or delay changing of choke lines. Replaceable parts for adjustable choke, other beam stops, retainers, and choke wrenches to be conveniently located for immediate use.
5. All valves to be equipped with handwheels or handles ready for immediate use.
6. Choke lines must be suitably anchored.

7. Handwheels and extensions to be connected and ready for use.
8. Valves adjacent to drilling spool to be kept open. Use outside valves except for emergency.
9. All seamless steel control piping (3000 psi working pressure) to have flexible joints to avoid stress. Hoses will be permitted.
10. Casinghead connections shall not be used except in case of emergency.
11. Do not use kill line for routine fill-up operations.


Attachment to Exhibit #1
NOTES REGARDING BLOWOUT PREVENTORS
Devon Energy Corporation (Nevada)
East Shugart Unit #26X
330' FSL & 780' FEL
Section 34-T18S-R31E, Unit P
Eddy County, New Mexico

1. Drilling nipple will be constructed so it can be removed mechanically without the aid of a welder. The minimum internal diameter will equal BOP bore.
2. Wear ring will be properly installed in head.
3. Blowout preventor and all associated fittings will be in operable condition to withstand a minimum 3000 psi working pressure.
4. All fittings will be flanged.
5. A full bore safety valve tested to a minimum 3000 psi WP with proper thread connections will be available on the rotary rig floor at all times.
6. All choke lines will be anchored to prevent movement.
7. All BOP equipment will be equal to or larger in bore than the internal diameter of the last casing string.
8. Will maintain a kelly cock attached to the kelly.
9. Hand wheels and wrenches will be properly installed and tested for safe operation.
10. Hydraulic floor control for blowout preventor will be located as near in proximity to driller's controls as possible.
11. All BOP equipment will meet API standards and include a minimum 40 gallon accumulator having two independent means of power to initiate closing operation.

MINIMUM CHOKE MANIFOLD
3,000, 5,000 and 10,000 PSI Working Pri

3 MWP · 5 MWP · 10 MWP

EXHIBIT 1A

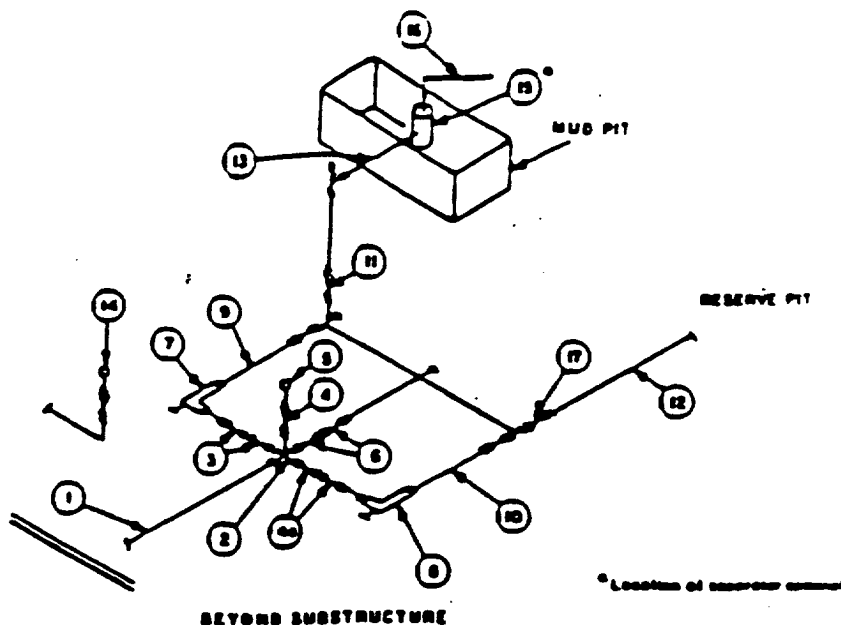

| MINIMUM REQUIREMENTS | | | | | | | | | | |
|----------------------|---|-----------|---------|--------|-----------|---------|--------|------------|---------|--------|
| No | | 3,000 MWP | | | 5,000 MWP | | | 10,000 MWP | | |
| | | I.D. | NOMINAL | RATING | I.D. | NOMINAL | RATING | I.D. | NOMINAL | RATING |
| 1 | Line from drilling steel | | 3" | 3,000 | | 3" | 5,000 | | 3" | 10,000 |
| 2 | Cross 3"x3"x3"x3" | | | 3,000 | | | 5,000 | | | |
| | Cross 3"x3"x3"x3" | | | | | | | | | 10,000 |
| 3 | Valves(1) Gate □ Plug □(2) | 3-1/8" | | 3,000 | 3-1/8" | | 5,000 | 3-1/8" | | 10,000 |
| 4 | Valve Gate □ Plug □(2) | 1-13/16" | | 3,000 | 1-13/16" | | 5,000 | 1-13/16" | | 10,000 |
| 4a | Valves(1) | 2-1/16" | | 3,000 | 2-1/16" | | 5,000 | 2-1/8" | | 10,000 |
| 5 | Pressure Gauge | | | 3,000 | | | 5,000 | | | 10,000 |
| 6 | Valves Gate □ Plug □(2) | 3-1/8" | | 3,000 | 3-1/8" | | 5,000 | 3-1/8" | | 10,000 |
| 7 | Adjustable Choke(2) | 2" | | 3,000 | 2" | | 5,000 | 2" | | 10,000 |
| 8 | Adjustable Choke | 1" | | 3,000 | 1" | | 5,000 | 2" | | 10,000 |
| 9 | Line | | 3" | 3,000 | | 3" | 5,000 | | 3" | 10,000 |
| 10 | Line | | 2" | 3,000 | | 2" | 5,000 | | 3" | 10,000 |
| 11 | Valves Gate □ Plug □(2) | 3-1/8" | | 3,000 | 3-1/8" | | 5,000 | 3-1/8" | | 10,000 |
| 12 | Lines | | 3" | 1,000 | | 3" | 1,000 | | 3" | 2,000 |
| 13 | Lines | | 3" | 1,000 | | 3" | 1,000 | | 3" | 2,000 |
| 14 | Remote reading compound standpipe pressure gauge | | | 3,000 | | | 5,000 | | | 10,000 |
| 15 | Gas Separator | | 2'x5' | | | 2'x5' | | | 2'x5' | |
| 16 | Line | | 4" | 1,000 | | 4" | 1,000 | | 4" | 2,000 |
| 17 | Valves Gate □ Plug □(2) | 3-1/8" | | 3,000 | 3-1/8" | | 5,000 | 3-1/8" | | 10,000 |

(1) Only one required in Class 3M.

(2) Gate valves only shall be used for Class 10M.

(3) Remote operated hydraulic chokes require an 5,000 psi and 10,000 psi for drilling.

EQUIPMENT SPECIFICATIONS AND INSTALLATION INSTRUCTIONS

- All connections in choke manifold shall be welded, mudded, banded or Cameron clamp of comparable rating.
- All Banges shall be API 6B or 6BX and ring gaskets shall be API RX or BX. Use only BX for 10 MWP.
- All lines shall be securely anchored.
- Chokes shall be equipped with tungsten carbide seats and needles, and replacements shall be available.
- Choke manifold pressure and standpipe pressure gauges shall be available at the choke manifold to assist in regulating chokes. As an alternate with automatic chokes, a choke manifold pressure gauge shall be located on the rig floor in conjunction with the standpipe pressure gauge.
- Line from drilling steel to choke manifold should be as straight as possible. Lines downstream from chokes shall make turns by large bends or 90° bends using bull plugged tees.
- Discharge lines from chokes, choke bypass and from top of gas separator should vent as far as practical from the well.