


(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Las Cruces
Lease No. 666133
Unit Production Unit

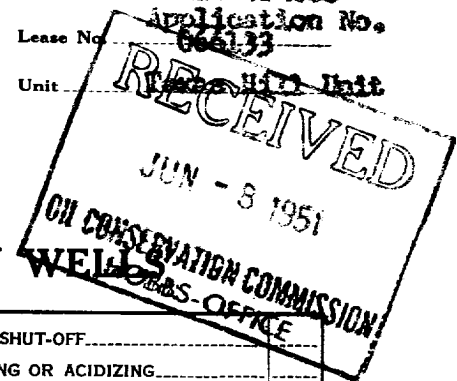

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	3	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

H. W. Pass No. 1

Hobbs, New Mexico May 31, 1951

Well No. 1 is located 47 ft. from N line and 250 ft. from E line of sec. 5

S 3/4 Sec. 5 (1/4 Sec. and Sec. No.) 22-1 (Twp.) 10-2 (Range) N. 28. 2. E. (Meridian)
Wilcox (Field) Wilcox (County or Subdivision) New Mexico (State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

It is our intention to drill a well at the above location to a depth of approximately 3000' with cable tools and to continue drilling with rotary tools to a total depth of approximately 5000', unless commercial production is obtained at a lesser depth. All casing points will be cemented in accordance with approved methods of the U.S. Geological Survey and any other special requirements will be complied with.

It is planned to use the following casing pattern: 16" conductor pipe to be set at approximately 10' and cemented to the surface; 18" to be set at approximately 1500' without cement unless necessary to obtain water shut-off; 10 3/4" to be set at approximately 3000' and cemented with 500 sacks cement; 7 5/8" casing to be set at approximately 5000' and cemented with 120 sacks cement; and if commercial production is indicated, 5 1/2" casing to be set at approximately 5100' and cemented with 320 sacks cement, or sufficient cement to protect any possible productive zones encountered while drilling.

Approval to produce this well upon completion is also requested.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Continental Oil Company

Address Box 60

Hobbs, New Mexico

By _____

Title District Superintendent