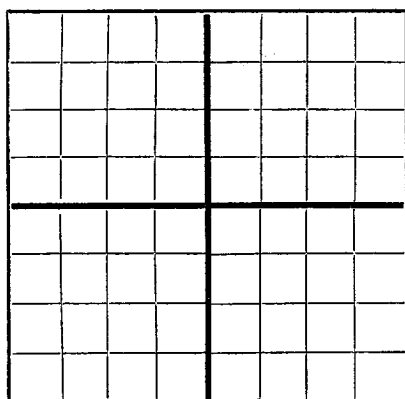


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Malco-Ressler

Carper Building, Artesia, New Mexico

Edith Riggs Company or Operator 1 SE SW Address 21 S
Well No. 1 in of Sec. T.
R. 24 E N. M. P. M. Wildest Eddy
Well is 1290 feet south of the North line and 320 feet west of the East line of Sec. 8 County.
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Address
If Government land the permittee is Edith Riggs Address Carlsbad, New Mexico
The Lessee is Address
Drilling commenced May 10 1948 Drilling was completed July 15 1948
Name of drilling contractor Kersey Drilling Co. Address
Elevation above sea level at top of casing 3900 feet.
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from none to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 600 to 700 feet. 300' W/H
No. 2, from 1300 to 1400 feet. 100' W/H
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
None									

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
None						

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 0 feet to 1496 feet, and from feet to feet

PRODUCTION

Put to producing 19
The production of the first 24 hours was barrels of fluid of which Dry and Abandoned % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Kersey Drilling Co. Driller Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 22nd

day of July 1948

Marie M. Easley
Notary Public

My Commission expires February 25, 1952

Artesia, New Mexico July 22, 1948

Name Viles P. Shelton

Position Representative

Representing Malco & Ressler Company or Operator

Address Carper Building, Artesia, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
40	240	200	Anhydrite
240	260	20	Red sand
260	410	150	Anhy and Lime
410	485	75	Gray sand
485	540	55	Gray Lime
540	560	20	Gray sand
560	845	285	Gray Lime
845	919	74	Red and gray sand
919	1080	159	Buff dolomite
1080	1100	20	Gray sand
1100	1496	396	Buff dolomite