

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE\*  
(Other instructions on reverse side)Form approved.  
Budget Bureau No. 42-R1424.

## SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER <input type="checkbox"/>		RECEIVED		5. LEASE DESIGNATION AND SERIAL NO. NM 672	
2. NAME OF OPERATOR Western Oil Producers, Inc.		JAN 9 1973		6. IF INDIAN, ALLOTTEE OR TRIBE NAME	
3. ADDRESS OF OPERATOR P. O. Box 2055, Roswell, N. M. 88201		O. C. C.		7. UNIT AGREEMENT NAME	
4. LOCATION OF WELL (Report location clearly and in accordance with any State Regulations. See also space 17 below.) At surface 1650' FNL, 2310' FEL, Sec 25, T-22-S, R-25-E		RETURN TO OFFICE		8. FARM OR LEASE NAME McKittrick Fed.	
14. PERMIT NO.		15. ELEVATIONS (Show whether DF, RT, GR, etc.) G.L. 3495		9. WELL NO. 1	
				10. FIELD AND POOL, OR WILDCAT W.C.	
				11. SEC. T., R., M., OR B.L. AND SURVEY OR AREA Sec 25, T-22-S, R-25-E	
				12. COUNTY OR PARISH Eddy	
				13. STATE N. M.	

## 16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

## NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON\*

CHANGE PLANS

X

## SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)


REPAIRING WELL

ALTERING CASING

ABANDONMENT\*


17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

10/1/72

Re-entered, drilled cement plugs. Cleaned out hole to 7250', (top of 5 1/2" csg spotted 125 sx cement plug. WOC 24 hrs, found top cement 6950', drilled same to 7000', side tracked hole, drilled to 11,365', tested Morrow sand. Gas TSTM.

11/12/72

Requested verbal approval to P.A. w/plugs at:  
11,100' to 11,000', 9,100' to 9,000', 7260' to 7160', 6487' to 6387',  
4863' to 4763', 798' to 698', surface.

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE Supt.


DATE 11/28/72

(This space for Federal or State office use)

APPROVED BY  
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

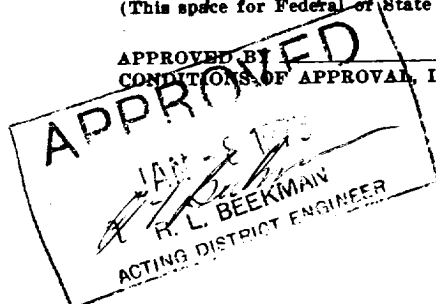

\*See Instructions on Reverse Side