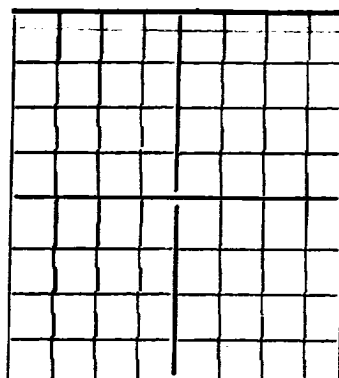


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

WELL RECORD

E. ORCUTT, ET AL

Company or Operator

Artesia, New Mexico

Address

R. H. Newman-State

Well No. 1

in SE SW

of Sec. 16

T. 21 S

Lease

R. 26 E

N. M. P. M.

Wild Cat

Field, Eddy

County

Well is 660 feet ~~from~~ North South of the North line and 1980 feet East West of the East line of Section 16

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is R. H. Newman Address Vinton, Va.

Drilling commenced May 10 19 42 Drilling was completed July 3 19 42

Name of drilling contractor Walker & Reddell Address

Elevation above sea level at top of casing feet

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 455' to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 375 to 385 feet

No. 2, from 930 to 940 feet

No. 3, from to feet

No. 4, from to feet

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 1250 feet, and from feet to feet

PRODUCTION

Put to producing, 19

The production of the first 24 hours was None barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

W. D. Walker, Driller, Driller

J. L. Reddell, Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Robb, New Mexico

October 19, 1943

Subscribed and sworn to before me this

Name

day of, 19

Position

Owner

Notary Public.

Representing

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Caliche
20	40	20	Anhydrite
40	50	10	Red Bed
50	90	40	Anhydrite & Gypsum
90	110	20	Lime
110	110	50	Brown Shale
110	115	5	Water sand
115	160	15	Brown Shale
160	180	20	Lime
180	195	15	Gray Shale
195	210	35	Sand and Shale
210	250	10	Lime
250	268	18	Shale
268	300	32	Lime Sulphur water @ 295'
300	340	40	Soft shale
340	375	35	Soft Lime
375	385	10	Sand Hole full fresh water @ 377-385'
385	400	15	Brown soft shale
400	460	60	Lime Show oil @ 455'
460	530	70	Lime and shale
530	545	15	Lime
545	555	10	Brown Lime
555	580	20	White Lime
580	675	95	Lime
675	740	65	Gray Sand
740	750	10	Sandy Shale
750	760	10	Sand and Gypsum
760	770	10	Anhydrite and Lime
770	930	160	Lime
930	940	10	Sulphur water sand
940	1042	102	Lime
1042	1050	8	Water sand
1050	1250	200	Lime Sulphur water @ 1125-1127'