

N.

## NEW MEXICO OIL CONSERVATION COMMISSION

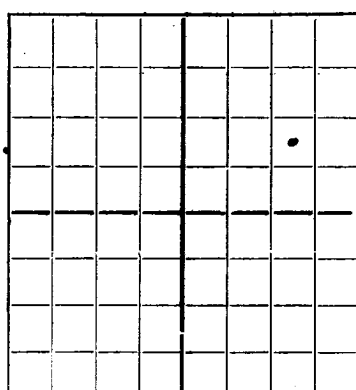
Santa Fe, New Mexico

SANTA FE  
ARTESIA  
HOBBS  
OPERATOR

## WELL RECORD

RECEIVED  
JUN 11 1952  
Oil Cons. Comm.  
Artesia Office

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

AREA 640 ACRES  
LOCATE WELL CORRECTLY

Fred A. Bond

G. G. Isen

Well No. 1 Company or Operator, Lease in NW 1/4 SE 1/4 of Sec. 24, T. 21-S

R. 27-E, N. M. P. M., Field, Eddy County.

Well is 1980 feet from South line and 1980 feet from East line of Sec. Above

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is G. G. Isen Address Carlsbad N.M.

If Government land the permittee is Address

The Lessee is Fred A. Bond Address Carlsbad N.M.

Drilling commenced Aug 25 1951 Drilling was completed April 5 1952

Name of drilling contractor Fred A. Bond Address Carlsbad N.M.

Elevation above sea level at top of casing feet.

The information given is to be kept confidential until 19

## OIL SANDS OR ZONES

No. 1, from None to No. 4, from None to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 125' to 132' feet 3 Bailsers P. H.

No. 2, from 378' to 384' feet Hole full - Sweet

No. 3, from 776' to 781' feet Hole full - Sulphur water

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10"	32	8	Natl	103'	Texas	None	None	Shut off water
8 1/4"	24	8	Natl	397'	Texas	✓	✓	✓

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHOUL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet.

Cable tools were used from feet to feet, and from feet to feet.

## PRODUCTION

Put to producing 19

The production of the first 24 hours was barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

Driller Driller

Driller Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Carlsbad N.M. May 1, 1952  
Place Date

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
-	15'	15'	Calcare & Gyp
15'	25'	10	Yellow Clay - Lime Shell
25'	60'	35	Blue Shale
60	100	40	Black Shale
100	125	25	Yellow lime
125	190	65	Red Shale
190	330	140	Lime shells & shale
330	376	46	Gray lime
376	384	8	Sandy lime - Sweet Water
384	560	116	Lime
<del>560</del>	650	90	Salt
650	776	126	Gray Lime
776	781	5	Lime - Brown Water
781	920	139	White Lime
920	925	<del>5</del>	Black Shale
925	1004	79	White Lime
			T.D.