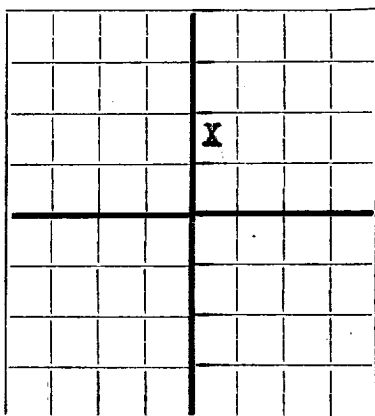


N

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

George Turner, 417 1st. Nat'l Bnk. Bldg., El Paso, Texas.
George Turner Company or Operator Address
B-7718 Well No. Wildcat in SW 1/4 NE 1/4 of Sec. 21, T. 20 South
Lease
R. 28 East, N. M. P. M., Wildcat Field, Eddy County.
Well is 1650 feet south of the North line and 2310 feet west of the East line of Section 21
If State land the oil and gas lease is No. B-7718 Assignment No. B33468
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is George Turner Address El Paso, Texas.
Drilling commenced October 6 1947 Drilling was completed November 10 1947
Name of drilling contractor J. M. Cribbs Address Carlsbad, N. M.
Elevation above sea level at top of casing 3240 feet.
The information given is to be kept confidential until No time request 19

OIL SANDS OR ZONES

No. 1, from 792 to 832 (Dry) No. 4, from to
No. 2, from 848 to 856 (Dry) No. 5, from to
No. 3, from 918 to 922 (Water) No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 101 to 104 feet. 4
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8"	28	10	U.S.	206'	O.D.	No	No	No	Water shut off
7"	20	10	U.S.	607'	O. D.	No	No	No	Oil string.

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
8 5/8"	206'	None	casing all pulled when well abandoned.			
6"	7"	607'	None	Casing all pulled when well abandoned.		

PLUGS AND ADAPTERS

Heaving plug—Material None Length Depth Set
Adapters—Material None Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
None	--	--	--	--	--	--

Results of shooting or chemical treatment Well was neither shot or acidized.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from None feet to feet, and from feet to feet
Cable tools were used from 0' feet to 922' feet, and from feet to feet

PRODUCTION

Put to producing None, 19
The production of the first 24 hours was barrels of fluid of which % was oil; %
emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours None Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

J. H. Cribbs, Driller J. W. Payne, Driller
J. D. Alexander, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 24th El Paso, Texas. Jan. 24, 1948
Name

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	2	2	Top sand
2	6	4	Caleche
6	30	24	Red clay
30	33	3	Shells and clay
33	101	68	Red bed
101	104	3	Sand (Water show)
104	206	102	Red bed and white clay mixed.
206	211	5	Red bed
211	240	29	Gypsum
240	301	61	Red bed and gyp mixture.
301	304	3	Blue shale
304	311	7	Red bed
311	452	141	Salt
452	602	150	Anhydrite
602	609	7	Brown lime (Hard)
609	629	20	Anhydrite
629	641	12	Gray lime (Hard)
641	792	151	Anhydrite
792	793	1	Sand (Dry)
793	832	39	Sandy lime
832	848	16	Lime (Hard)
848	856	8	Sandy lime
856	894	38	Gray lime
894	898	4	White lime (Hard)
898	918	20	Gray lime
918	922	4	Sand (Salt water)