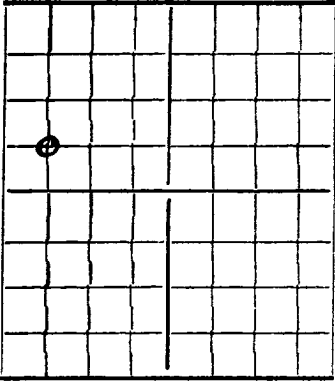


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

38-015-02468

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

WELL RECORD

Schuster & Messenger
Company or Operator
Carlsbad, New Mexico
Address

Page 1 Well No. 1 in Sec. 15 of T. 21S
Lease

R. 28, N. M. P. M., Fenton Field, Eddy County.

Well is 1980 feet south of the North line and 4620 feet west of the East line of Sec. 15

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is Page Address

The Lessee is Page (Government) Address Roswell, New Mexico

Drilling commenced 6/25 19 43 Drilling was completed 6/28 19 43

Name of drilling contractor C. S. Messenger Address Carlsbad, New Mexico

Elevation above sea level at top of casing 3287 feet.

The information given is to be kept confidential until 10 19

OIL SANDS OR ZONES

No. 1, from 2620 to 2649 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 175 to 180 feet.

No. 2, from 180 to 240 feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
8 1/2"				397'				50 sacks
7"				2580'				100 sacks
2"				2609'				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
*see above	under casing	Record				

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	2 1/4"	Solidified Nitro.	20 qts.	6/14/43	2633-49	2649'.

Results of shooting or chemical treatment pumping 2 1/2 barrels of oil per hour.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from surface feet to 2649 feet, and from feet to feet

PRODUCTION

Put to producing June 28, 19 43.

The production of the first 24 hours was 50 barrels of fluid of which 100 % was oil; % emulsion; % water; and % sediment. Gravity, Be 44

If gas well, cu. ft. per 24 hours Very little gas Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Clarence Corbett Driller John K. Kahan Driller

Jack East Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 7/21/43 day of July, 19 43

Notary Public.

My Commission expires

Carlsbad, N.M. 7/21/43
Place Date

Name C. S. Messenger
Position Driller
Representing Schuster & Messenger
Company or Operator

Address Carlsbad, N.M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Caliche
20	175	155	Red beds
175	180	5	Sand - water
180	210	30	Anhydrite
210	230	20	Red rock
230	240	10	Sand - water
240	337	97	Anhydrite
337	365	28	Shale & anhydrite
365	385	20	Blue shale
385	392	7	Red rock
392	398	6	Lime
398	430	32	Blue shale
430	510	80	Red rock
510	545	35	Anhydrite
545	580	35	Red rock
580	595	15	Anhydrite
595	1115	520	Salt
1115	1150	35	Anhydrite
1150	1275	125	Salt
1275	1300	25	Anhydrite
1300	1335	35	Salt
1335	1365	30	Salt & anhydrite
1365	1380	15	Salt
1380	2300	920	Anhydrite
2300	2355	55	Anhydrite & dolomitic anhydrite
2355	2455	100	Lime (top Del.Li:2355)
2455	2480	25	Lime & sandy lime
2480	2602	22	Lime
2602	2626	24	Sand (Top Del.sand) Show oil 2620-26. Ran jeep @ 2626'.

Jeep Correction: 2626 = 2644

Top Del.sd. 2620 corrected.
S/O 2638-44 corrected.
2644-49 sd. - showing oil.