


(SUBMIT IN TRIPLICATE)

Land Office \_\_\_\_\_

Lease No. **W-016801**

Unit \_\_\_\_\_

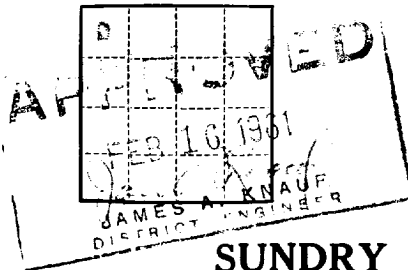

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

RECEIVED

FEB 20 1961

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT (X)
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY
NOTICE OF INTENTION TO ABANDON WELL	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

December 21st, 1959

Well No. **1** is located **330** ft. from **N** line and **330** ft. from **W** line of sec. **32**  
**W 1/4 W 1/4 Sec. 32** **T-21-S, R-29-E** **SNPM**  
 (1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
**Acadon** **day** **New Mexico**  
 (Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is **3240** ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

**E. P. Campbell No. 1 Gulf-Federal "B"**

Total Depth **1108** feet.

Set New **1 7/8** " Casing **930** feet with **20** sacks cement.

Pulled **7** " Surface Casing

The following Plugs were used: **925-1025** feet with **20** sacks cement,  
**675-775** feet with **20** sacks cement,  
**300-400** feet with **20** sacks cement,  
**0-100** feet with **20** sacks cement  
 Marker on Surface.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **E. P. Campbell**

Address **1403 Broadway**

**Lubbock, Texas**

By **E. A. Swaney**

Title **Geologist**