


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

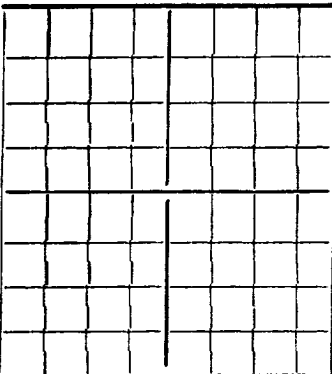

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

H. C. Wells, et al  
Company or Operator  
Carlsbad, New Mexico  
Address  
State # 1. Well No. 1 in Lot # 2 of Sec. 19, T. 20 S  
Lease  
R. 30 E., N. M. P. M., Getty Field, Eddy County.  
Well is 330 feet south of the North line and 330 feet west of the East line of section 19  
If State land the oil and gas lease is No. 132230 Assignment No. none  
If patented land the owner is, Address  
If Government land the permittee is, Address  
The Lessee is, Address  
Drilling commenced February 23 1937 Drilling was completed March 25 1937.  
Name of drilling contractor E. P. Moran, Address Carlsbad, New Mexico  
Elevation above sea level at top of casing feet.  
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from to No. 4, from to  
No. 2, from to No. 5, from to  
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.  
No. 1, from 187 to 195 feet. small amount  
No. 2, from to feet.  
No. 3, from to feet.  
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10 3/4 40#		8		150'				
8 1/2	30	8		385'				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/2	10 3/4	150	none			
10	8 1/2	385	50			

PLUGS AND ADAPTERS

Heaving plug—Material None Length Depth Set  
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		None				

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet  
Cable tools were used from 0 feet to 1790 feet, and from feet to feet

PRODUCTION

Put to producing, 19.  
The production of the first 24 hours was None barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be  
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas  
Rock pressure, lbs. per sq. in.

EMPLOYEES

S. J. Poteet, Driller Coleman Kerr, Driller  
E. P. Moran, Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Carlsbad, N. M. May 11, 1937  
Place Date  
Subscribed and sworn to before me this 14 day of May, 1937  
Name H. C. Wells  
SEAL Patricia Mahoney Notary Public. Position Partner  
Representing Company or Operator

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20		Caliche
20	40		Red Rock
40	85		Red sand
85	95		Gravel
95	175		Red sand
175	179		Brown shale
179	198		Gravel
198	208		Lime
208	225		Anhy
225	265		Red rock
265	270		Blue shale
270	330		Red beds
330	360		Red rock
360	370		Red beds
370	725		Salt
725	745		Red beds
745	785		Salt
785	820		Red beds and salt
820	1090		Salt
1090	1130		Sand and red beds
1130	1170		Salt
1170	1190		Anhy
1190	1200		White salt
1200	1220		Anhy
1220	1398		Salt
1398	1402		Grey sticky shale
1402	1465		Red beds
1465	1475		Red rock
1475	1553		Broken formation
1553	1560		Anhy
1560	1570		Red rock
1570	1590		Salt, potash, and anhy
1590	1606		Blue shale
1606	1630		Anhy
1630	1695		Salt
1695	1755		Anhy
1755	1785		Lime
1785	1790		Sulphur water--hole abandoned