


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

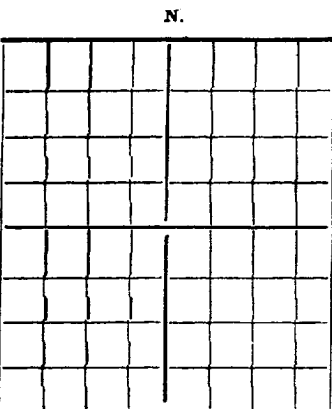

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

W. C. Wells
Company or Operator
State # 1 Well No. 1 in SW NE of Sec. 19, T. 20
R. 30, N. M. P. M., Getty Field, Eddy County.
Well is 2490 feet south of the North line and 2490 feet west of the East line of section 19
If State land the oil and gas lease is No. B-2230 Assignment No.
If patented land the owner is, Address
If Government land the permittee is, Address
The Lessee is H. C. Wells, Address 3501 Pershing Dr. El Paso, Texas
Drilling commenced March 20 19 25 Drilling was completed Oct. 28 19 35
Name of drilling contractor Stovall Drlg Co., Address Carlsbad, New Mexico
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 1625 to 1630 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from 180 to feet. rose about 100
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
12 1/2	40	8	Natl	162	natl	none			
10	32	8	"	450	"	"			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	1000gal	10-2-35	1686-1720	Bailed dry

Results of shooting or chemical treatment None

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 0 feet to 1753 feet, and from feet to feet

PRODUCTION

Put to producing none, 19
The production of the first 24 hours was none barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours none Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in. none

EMPLOYEES

E. A. Stovall, Driller Clydex Hicks, Driller
W. D. Walker, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Carlsbad, New Mex. Nov 21, 1935
Place Date
Subscribed and sworn to before me this Name H. C. Wells
day of, 19 Position
Notary Public. Representing

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	15		Gyp
15	50		Red beds
50	160		Quick sand carrying water
160	300		Red beds
300	340		Anhy
340	450		Broken anhy & red beds
450	1221		Salt and anhy
1221	1350		Anhy and red beds
1350	1400		Anhy
1400	1630		Lime, show of oil and water at 1630, hole filled up 1000' well temporarily shut down, dumped 15 sacks cement in bottom of hole May 1925. All casing left in well. Resumed drilling deeper October 17th, 1935
1630	1753		Hard grey lime saturated with oil
1753			Total depth.