


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

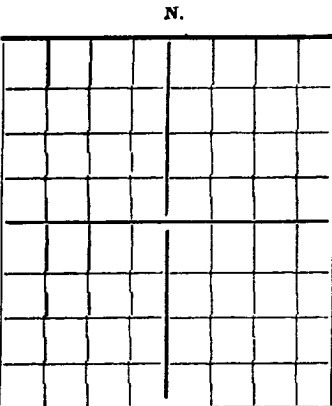

WELL RECORD

2390 FSL
250 FWH

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Sullivan-Rundle Roswell, New Mexico
Company or Operator Address
Well No. 1 in NW SW of Sec. 19, T. 20
Lease
R. 30, N. M. P. M., Getty Field, Eddy County.
Well is feet south of the North line and feet west of the East line of
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is, Address
If Government land the permittee is, Address
The Lessee is R. B. Rehn, Address Roswell, New Mexico
Drilling commenced Jan 8th 19 29. Drilling was completed March 30 19 29
Name of drilling contractor L. C. Bivins, Address Roswell, New Mexico
Elevation above sea level at top of casing 3310 feet.
The information given is to be kept confidential until March 30th 19 29.

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from 201 to 208' feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10"	40#	8		250'					
8 1/4"	28#	10		314'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
8 1/4"	8 1/4"	214'	8	Dump	60% ?	Hole full ?

PLUGS AND ADAPTERS

Heaving plug—Material Wooden Length 4' Depth Set 360'
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 0 feet to 1345' feet, and from feet to feet

PRODUCTION

Put to producing, 19.
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours. Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

L. C. Divins, Driller, Driller
M. C. Stell, Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 25th day of June, 19 29
SEAL Blanche McCoy
Notary Public.
Name L. C. Bivins
Position Contractor
Representing Sullivan-Rundle
Company or Operator

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	15		Gyp
15	103		Sandy red beds
103	117		Gravel
117	125		Red bed and gyp
125	201		Gyp
201	208		Gravel - water
208	233		Lime
233	243		Red bed
243	260		Lime
260	288		Red bed
288	319		Shale, gray
319	337		Red bed
337	358		Gyp
358	366		Red bed
366	385		Gyp
385	390		Red bed & salt
390	1167		Salt
1167	1200		Anhy
1200	1345		White salt
1345			Total depth