


LTR



Job separation sheet

11-10-11



ATU



In via nazionale col

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Las Cruces
Lease No. 061641
Unit _____

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT..... <input checked="" type="checkbox"/>
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....
NOTICE OF INTENTION TO ABANDON WELL.....	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

"Carper-Bosworth"

October 14, 1949

Well No. 1 is located 460 ft. from N line and 1980 ft. from W line of sec. 8

9 8 21 31 N
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)

Alamo Doña New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 3407 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

October 1, 1949, this well was plugged as follows: From 4504' back to 3990' heavy mud and a 20 sack cement plug run from 3990' to 3887', pipe parted at 3450', heavy mud to 2550', 15 sack cement plug 2550' back to 2475'. Base of salt at 2550'. Heavy mud back to 950' top of salt and a 15 sack cement plug from 950' back to 875'. Heavy mud to surface where a 10 sack cement plug set, regulation marker placed in cement and location cleaned and leveled.

(Confirmed in verbal conversation between John A. Frost and Marshall Rowley
September 29, 1949.)

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company I. M. Bosworth


Address c/o Marshall Rowley

Carper Building

Artesia, N. M.

By _____

Title Designated Agent




LTR



Job separation sheet

1000



1000

1000

1000

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Las Cruces
Lease No. 061641
Unit _____

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

"Carper-Bosworth" _____ October 14 _____, 19 49

Well No. 1 is located 660 ft. from S line and 1980 ft. from E line of sec. 8

21 S 31 E MM
(4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)

Alameda Doña New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 3407 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

October 1, 1949, this well was plugged as follows: From 4504' back to 3990' heavy mud and a 20 sack cement plug run from 3990' to 3687', pipe parted at 3450', heavy mud to 2550', 15 sack cement plug 2550' back to 2475'. Base of salt at 2550'. Heavy mud back to 950' top of salt and a 15 sack cement plug from 950' back to 875'. Heavy mud to surface where a 10 sack cement plug set, regulation marker placed in cement and location cleaned and leveled.

(Confirmed in verbal conversation between John A. Frost and Marshall Rowley September 29, 1949.)

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company I. M. Bosworth


Address c/o Marshall Rowley

Carper Building

Artesia, N. M.

By _____

Title Designated Agent

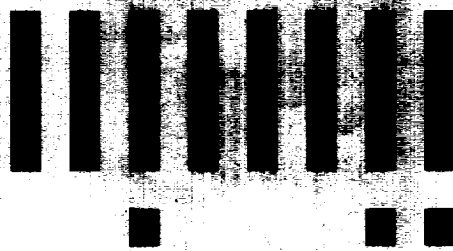

LTR



Job separation sheet

THE
LIBRARY
OF THE
CONGRESS
READINGS
ROOM
510
CAPITOL BUILDING
WASHINGTON, D. C. 20540



11

12

13

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Las Cruces

Lease No. 0616A1

Unit _____

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT..... <input checked="" type="checkbox"/>
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....
NOTICE OF INTENTION TO ABANDON WELL.....	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

"Garner-Bosworth"

October 14, 1949

Well No. 1 is located 660 ft. from N line and 1980 ft. from W line of sec. 8

21 S 21 E 106PM
(Twp.) (Range) (Meridian)

Edray New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 3407 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

October 1, 1949, this well was plugged as follows: From 4504' back to 3990' heavy mud and a 20 sack cement plug run from 3990' to 3887', pipe parted at 3450', heavy mud to 2550', 15 sack cement plug 2550' back to 2475'. Base of salt at 2550'. Heavy mud back to 950' top of salt and a 15 sack cement plug from 950' back to 875'. Heavy mud to surface where a 10 sack cement plug set, regulation marker placed in cement and location cleaned and leveled.

(Confirmed in verbal conversation between John A. Frost and Marshall Rowley
September 29, 1949.)

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company I. M. Bosworth


Address c/o Marshall Rowley

Campor Building

Artesia, N. M.

By _____

Title Designated Agent

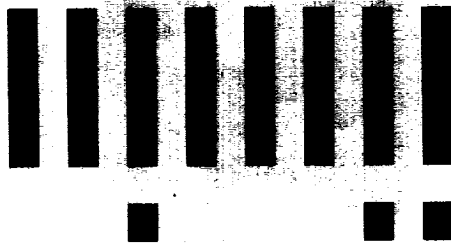

LTR



Job separation sheet

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Las Cruces

Lease No. 061641

Unit _____

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	X
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

"Carpenter-Bosworth" _____ October 14, 1949

Well No. 1 is located 460 ft. from N line and 1980 ft. from W line of sec. 8

21 S 31 E 10 N 10 W
(Twp.) (Range) (Meridian)
Alamosa Doña Ana New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 3407 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

October 1, 1949, this well was plugged as follows: From 4504' back to 3990' heavy mud and a 20 sack cement plug run from 3990' to 3637', pipe parted at 3450', heavy mud to 2550', 15 sack cement plug 2550' back to 2475'. Base of salt at 2550'. Heavy mud back to 950' top of salt and a 15 sack cement plug from 950' back to 875'. Heavy mud to surface where a 10 sack cement plug set, regulation marker placed in cement and location cleaned and leveled.

(Continued in verbal conversation between John A. Frost and Marshall Rowley September 29, 1949.)

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company C. A. Bosworth

Address c/o Marshall Rowley

Carpenter Building

Alamosa, N. M.

By _____

Title Designated Agent