

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or deepen or reentry to a different reservoir.

Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of well

☐ Oil

☐ Gas

☒ Other

SHUT IN

2. Name of Operator

CHEVRON U.S.A. INC.

3. Address and Telephone No.

P. O. Box 1150, Midland, TX 79702 (915)687-7148

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1650' FNL & 1650' FEL

UNIT G

SEC. 8, T22S, R23E

5. Lease Designation and Serial No.

NM 045272

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

BOGLE FLATS UNIT "A" COM

8. Well Name and No.

6

9. API Well No.

30-015-10578

10. Field and Pool, or Exploratory Area

INDIAN BASIN; UPPER PENN (PRO GAS)

11. County or Parish, State

EDDY, NM

CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

12. TYPE OF SUBMISSION

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☐ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☒ Other  
SIDETRACKED; SHUT IN

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut-Off


☐ Conversion to Injection

☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimate date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

POH W/TBG. SQUEEZED PERFS 7062'-7225' W/100 SX CL "H"; REVERSED OUT CMT. MILLED OUT 7" CSG 6657'-6690'. CIRC HOLE CLEAN. SPOTTED 60 SACK BALANCED PLUG 6740'-6450'; REVERSED OUT CMT. TAGGED CMT @ 6658'; DRLD CMT TO 6695'. SPOTTED 60 SACK BALANCED PLUG 6693'-6438'; REVERSED OUT CMT. TAGGED CMT @ 6479'; DRLD CMT TO 6659'. TIME DRILLED TO 6695', PAST STUB @ 6690'. SLIDE DRILLED 6695'-7151' (MD). SURVEYED AND CIRC SAMPLES TO SURF. REAMED 6-1/8" HOLE 6659'-7151'. RAN 5-1/2" LINER, SET @ 7151'. CMTD W/200 SX CL "C"; DRLD CMT 6942'-7151'. DRLD W/N2 7152'-7277'. ACZD @ 6642' W/1000 GALS 15% HCL. RIH W/COIL TBG TO 7215' & ACZD W/2500 GALS 15% HCL. KILLED WELL, ND BOPE & NU WH. SHUT IN WELL.

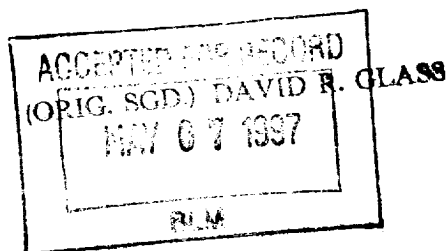

14. I hereby certify that the foregoing is true and correct

Signed

*G.K. Ripley*

Title

T. A.

Date

5/1/97

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any: