


SHELBY FEDERAL

McKITTRICK HILLS

2310' FNL # 990' FEL Sec 13, T-22-S, R-24-E
 Eddy Co., N.M.
 Elev 3878' GL.

PROPOSED
 PLUGGED CONDITION

ORIGINALLY DRILLED TO 8017 FOR DRY HOLE BY GETTY OIL
 RE-ENTERED IN 1973 BY SUPRON & DEEPEMED TO 10,766':
 1ST PRODUCTION FEB, 1975

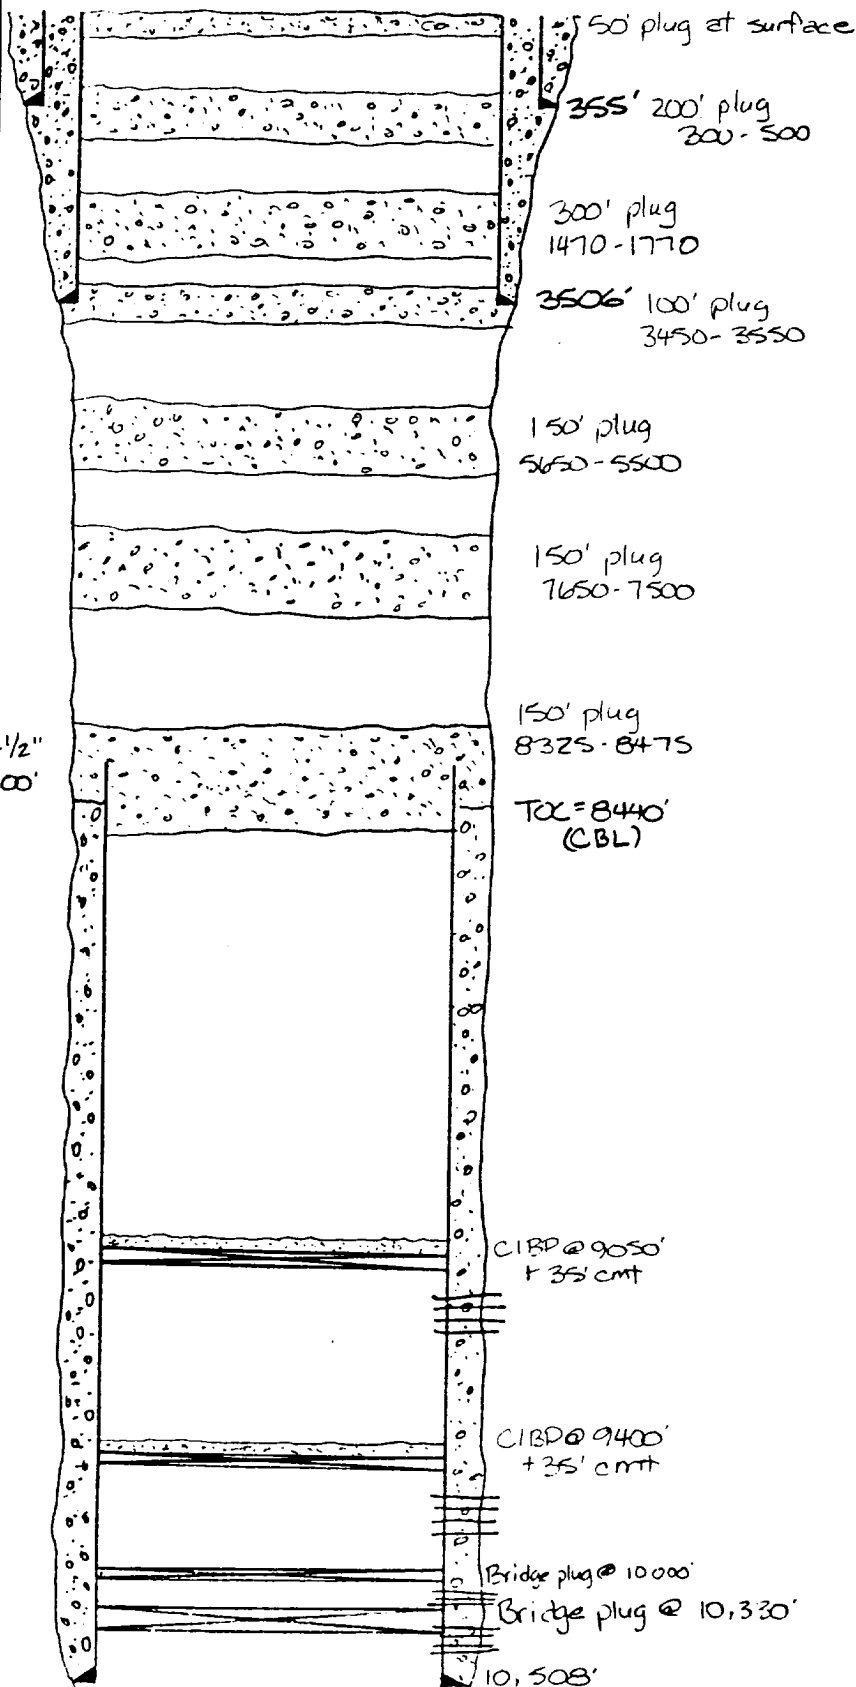

13 3/8" to 355' w/ 3505x
 17 1/2" hole
 (cement circ)

8 5/8" to 3506' w/ 15355x
 11" hole
 (cement circ)

4 1/2" 13.5# to 10,508'
 w/ STD 5x Class H
 7 7/8" hole
 (N-80 ST+C)

Perf Strawn 9094-9100'
 A/3000

Perf Atoka 9467-78
 A/2000 7 1/2% 'MS' acid

Perf Morrow 10267-220' F/17000*20%
 +CO₂