



December 5, 1994

GOVERNMENT Z #1

Current Configuration

Elevation: 18.4' KB-GL

1980' FSL & 1980' FWL

Sec 23 T20S R28E

Eddy Co., New Mexico

Tubing: (Top to Bottom)

2-7/8", 6.5# N-80 EUE 8rd sub
EUE 8rd X DSSHT XO
254 jts 2-7/8", 7.9# N-80 DSSHT
DSSHT X EUE 8rd XO
60 jts 2-7/8", 6.5#, N-80 EUE 8rd
2-7/8" 8rd X 2-3/8" 8rd XO
Baker On/Off Tool w/1.87 profile
5-1/2" X 2-3/8" Baker A-2 Loc-Set
Mule Shoe Sub

Packer Fluid:

Mixture of 2% KCl water and 10# brine

Wolfcamp Perfs 2 spf (1974):

9219', 21, 23, 25, 35, 37, 39, 41,
46, 51, 53, 55, 57, 59, 61, 65, 71,
73, 75, 77, 90, 99, 9301, 9303'

Strawn Perfs 6 spf:

10,135-41'


Morrow Perfs 2 spf (1989):

11,052-60', 11075-79', 11,095-102'
11,187-88', 11,193-97', 11,207-09'

Morrow Perfs 2 spf (1974):

11,313-20'

Prepared By: Robert Elliott

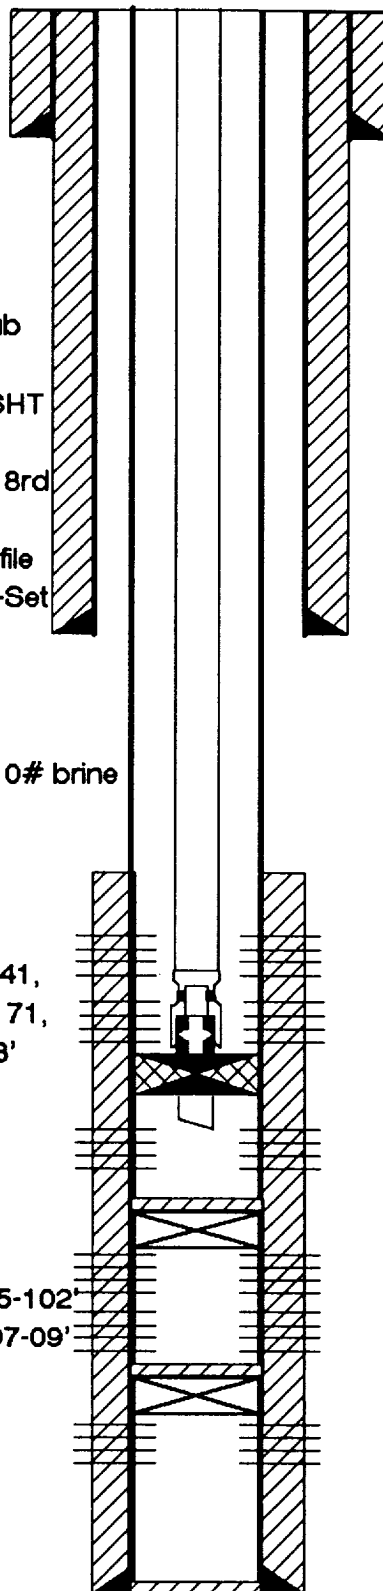

13-3/8", 48#, H-40 STC @ 625'
Cmt'd w/625 sx-circ'd to surface

9-5/8", 32&36#, H-40&J-55 ST&C
Set @ 3008'
Cmt'd w/1200 sx - circ'd to surface

TOC @ 8120' (Temp Svy)

Baker On/Off Tool @ 10,016'

Baker A-2 Lok-Set @ 10,018'
EOT @ 10,025'

CIBP @ 11,000' w/35'cmt on top

PBTD: 11,260'
CIBP @ 11,300'

5-1/2", 17 & 20#, N-80 LTC
Set @ 11,485'
Cmt'd w/900 sx
PBTD 11,432'
TD: 11,485'