

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
SUNDRY NOTICES AND REPORTS ON WELLS
(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

Expires August 31, 1985

5. LEASE DESIGNATION AND SERIAL NO.

NM-12828

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

SHELBY-FEDERAL

9. WELL NO.

4

10. FIELD AND POOL, OR WILDCAT

McKittrick Hills Upper Penn
(Gas)

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 12-T22S-R24E

12. COUNTY OR PARISH

Eddy

13. STATE

New Mexico

1. OIL WELL ☐ GAS WELL ☐ OTHER ☒ Re-entry

2. NAME OF OPERATOR

Nearburg Producing Company

3. ADDRESS OF OPERATOR

P. O. Box 31405 - Dallas TX 75231

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.)
At surface

1980' FNL & 1980' FEL

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3861.7' GR

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other) Activity

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)


17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

10/21-25/86: Set CIBP @ 7930'. Capped w/35' of cement. Ran Freepoint and cut off 5-1/2" casing at 7000'. Pulled 91 jts. of 5-1/2" casing. TIH with tubing and balanced a 50 sk. cement plug from 7075'-6925'. Tagged cement top at 6920'. Pulled up and spotted 50 sk. cement plug in open hole from 5000'-4900'. Pulled up to 3579' and spotted a 42 sk. cement plug. Tagged top of plug at 3450'. Re-cemented 5-1/2" casing at 3400' with 500 gallons mud flush followed by 200 sx. Class "H" 50/50 Poz with 5#/sk. salt. Waited on cement ±24 hrs. and tested to 1500 psi for 30 minutes - held. (BLM Carlsbad Office notified of test.)

ACCEPTED FOR RECORD

NOV 6 1986

CARLSBAD, NEW MEXICO

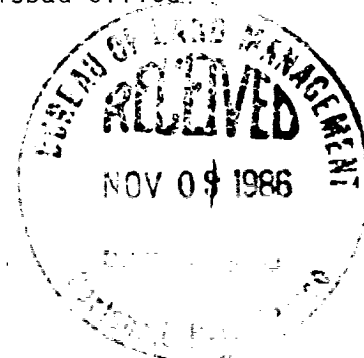

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE Engineering Manager

DATE 10/31/86

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side