




Oct 17, 1995

STATE CW #1

Current Configuration
Elevation: 19.8' KB-BHF

1980' FNL & 1980' FWL
Sec 19 T20S R28E
Eddy Co., New Mexico

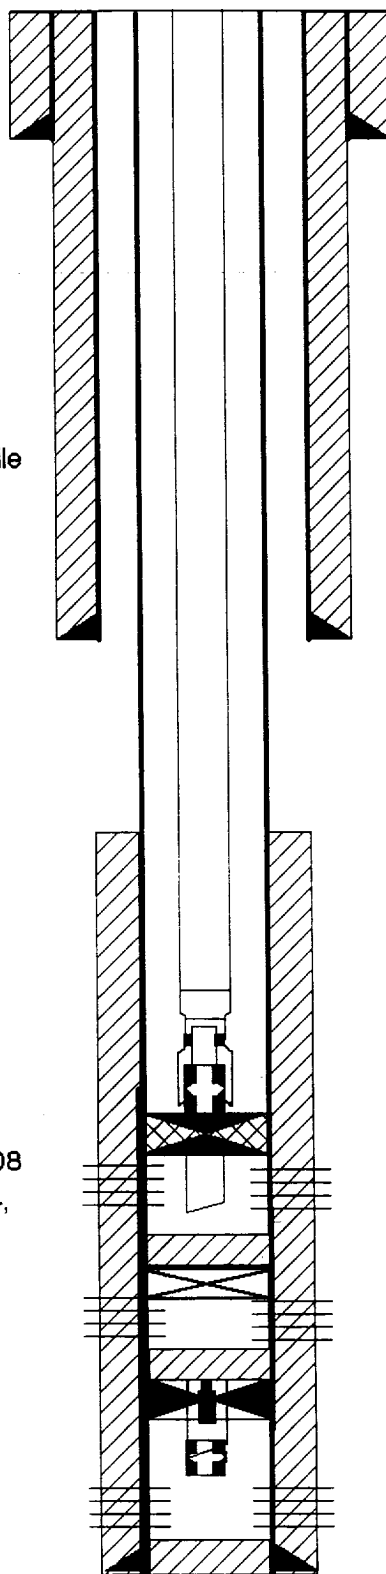

Tubing: (Top to Bottom)

334 jts 2-7/8", 6.5#,

(L-80 & N-80 AB MOD)

2-7/8" X 2-3/8" XO

Baker On/Off tool w/1.81" profile

5-1/2" X 2-3/8" Baker Loc-Set

2-3/8" PACT Tool 1'

WL Guide

13-3/8", 48#, H-40 STC @ 600'
Cmt'd w/500 sx-circ'd

8-5/8", 24 & 32#, K-55 ST&C
Set @ 3010'
Cmt'd w/1500 sx - circ'd

Atoka Perfs (3spf)

10,623, 24, 25, 26,

10,685, 86, 87, 88, 89, 707, 08

10,722, 23, 40, 41, 42, 43, 44,

10,786, 87, 88, 89, 90

Morrow Perfs (2 spf):

11,111-19'

Morrow Perfs (2 spf):

11,294, 95, 96, 97, 99, 301,

11,302, 303'

TOC @ 8227' (CBL)

17# Surf. - 9973'

20# 9973' - 11,375'

Baker On/Off Tool w/1.81"
w/1.81" profile @ 10,538'

Baker Loc-Set @ 10,540'

PBTD 11020

5.5 CIBP @ 11050'

PBTD 11,260'

Baker Model DB @ 11,275'

6' millout extension

Baker 1.81" F nipple @ 11,292'

5-1/2", 17 & 20#, N-80

Set @ 11,375'

Cmt'd w/700 sx

PBTD: 11,330'

TD: 11,375'