

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

5. Lease Designation and Serial No.

NM-12828

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

McKittrick Fed. Com. 11-I#1

9. API Well No.

10. Field and Pool, or Exploratory Area

Undesignated Cisco-Canyon

11. County or Parish, State

Eddy Co., NM

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

MAY 23 1997

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Nearburg Producing Company

3. Address and Telephone No.

P. O. Box 823085, Dallas, TX 75382-3085 (214) 739-1778

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

2,310' FSL & 960' FEL, Sec. 11, T-22-S, R-24-E

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION


- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Production Casing & Cement

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Drilled to 8,144'. C&C hole. RU and run 209 jts. 5-1/2" N80 17# K55 LTC casing. Set casing at 8,144'. Wash 30' to bottom. C&C hole. Cement 1st stage using 325 sacks cement, plus additives. Circ 64 sacks cement to pit. WOC 3 hours. Cement 2nd stage using 1,050 sacks cement, plus additives. Circ 280 sacks cement to pit. ND BOPE, set slips, cut-off 5-1/2" casing and weld on cap. Clean mud pits and release rig at 1,700 hours 5-8-97.

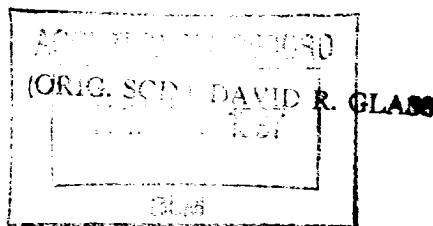

RECEIVED
1997 MAY 19 P 9:25
BUREAU OF LAND MGMT.
ROSWELL OFFICE

14. I hereby certify that the foregoing is true and correct

Signed

Title

Manager of Drilling & Production

Date May 14, 1997

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side